



INM LED ROADWAY LIGHTING
HIGH MAST LUMINAIRE



100+ Patent Certificates
\$1,000,000+ Annual Energy Saving
10,000+ Projects Successfully Installed

**Better Performance
Starts From Better Lighting**
www.aokledlighting.com

> Features of INM Series

INM features a smart lighting system, lid-latch driver box design easy installation & maintenance. Rugged, weather-tight design and up to 5G Vibration ratings (certain models), corrosion-resistant polyester powder painted. PMMA adopts a matrix full light cutting design. By adding a concave light retaining wall, excess light can be removed and the effect of receiving & blocking can be achieved. The design scheme can meet users' requirements for light seeing range to a greater extent. IP66 protection grade, waterproof structure design, IK10 shake-proof.

- PMMA adopts matrix full light cutting design. By adding a concave light retaining wall, excess light can be removed and the effect of receiving & blocking can be achieved. The design scheme can meet users' requirements for light seeing range to a greater extent.
- The overall streamline of the lamp body is beautiful, generous, and decent. The back adopts a fin-type of heat dissipation structure, with effect. Edge sinking design and convection vents, optimize air convection quality, strengthen heat dissipation, fully ensure the life of the fixture.
- Induction mounting hole is reserved. Offer customers more functional options and more convenience for upgrading in the future.
- IP66 protection grade, waterproof structure design + high resistance wire silicone waterproof ring design, double protection, safer. Better protection of the lamp IP performance.
- Super bracket design, bracket strength can support more than 10 times the weight of the lamp body, the safety factor is higher than counterparts.

UP TO 170 lm/W	100-277V 277-480V 50/60HZ	THD <20%	ULR =0	L80B10 >108000hrs @ 55°C	DIM
CRI 70/80/90	-3000K -4000K -5000K -5700K -6500K	IP66 IK10	5G VIBRATION TESTING	TOOL FREE MAINTENANCE	

Note: Normal Voltage=100-277VAC, High Voltage=277-480VAC, please evaluate before choosing. For the power supply in the United States and Canada, in case the input voltage fluctuation $\geq 240V$ the High Voltage solution is highly recommended for performance stability. Improper selection will cause damage to the driver or the light.



INM01



INM03



5 **10** **WARRANTY**
5 Year Limited Warranty,
10 Year Preferred Warranty.
Please consult with our sales for detailed agreement.

wally@aokledlight.com
+1 626-986-4050 (US)
+86 755 2357 9148 (CN)
©2023 AOK LED LIGHT CO., LTD. All Right Reserved.




> Photometric Design

iNM light engine using reflective technology to optimize application efficiency and minimize glare. The efficient design of the LED modules makes each light engine highly customizable, allowing the light distribution to be aimed toward the application.



- LM-79 test and report in accordance with IESNA Standard.
- iNM01: 3000K~6500K CCT; iNM03: 2700K~6500K CCT.
- Minimum CRI of 70, 80 and 90 optional.

We deliver innovation and customization, further expanding the flexibility of the project. Exceptional uniformity and low glare for maximum comfort.

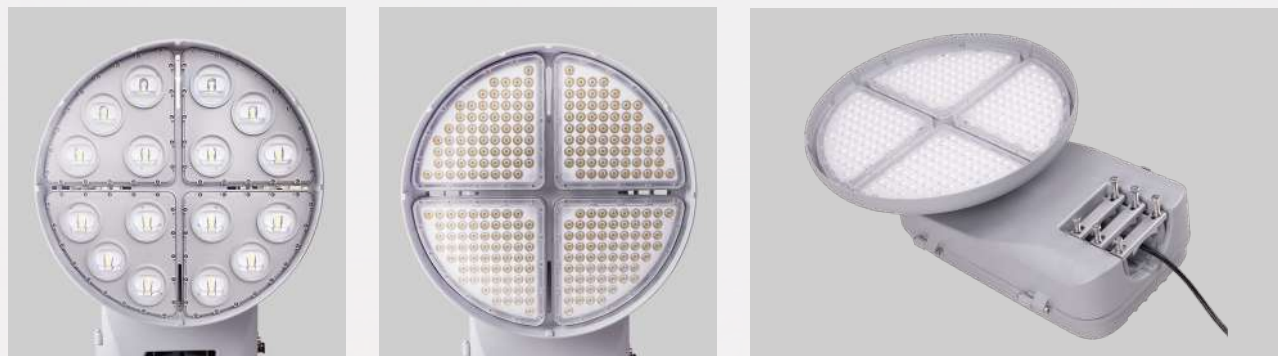

- The photometric engine takes advantage of the latest generation of powerful LEDs and dedicated optics for professional applications.
- Combined with Lumileds/Seoul LEDs that provide an alternative solution for those who are looking for very cost-effective yet efficient lighting while keeping the same luminaire design.

Distribution

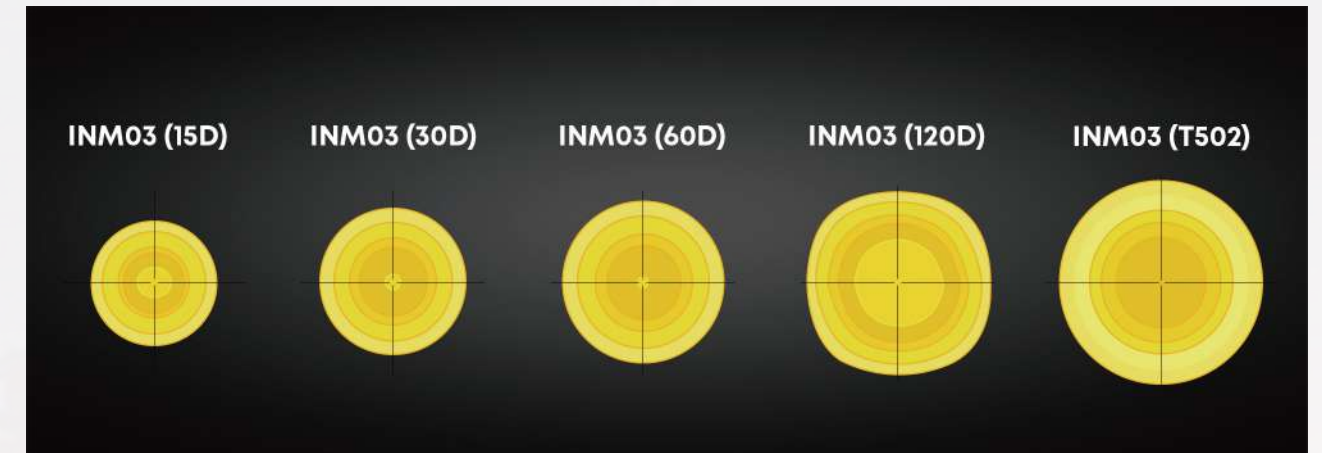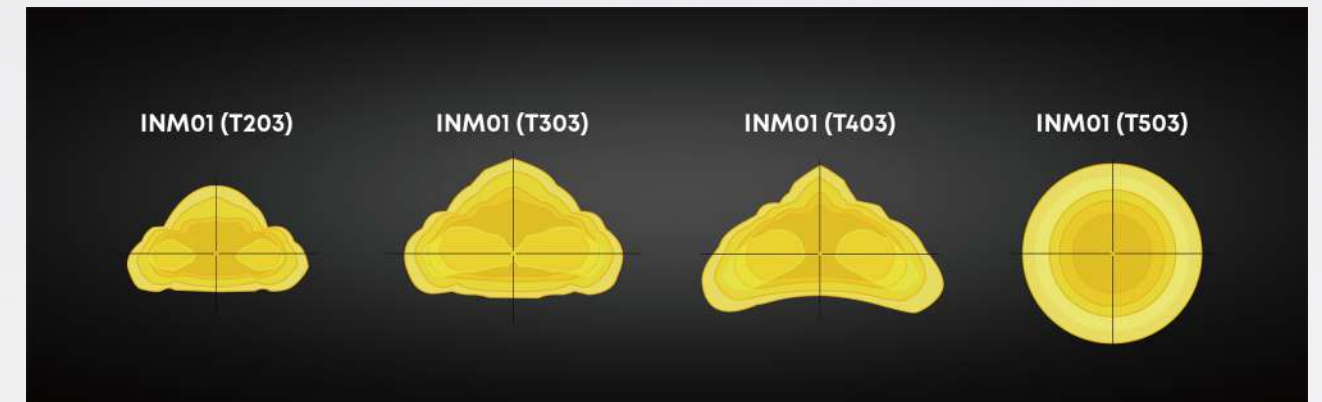


> Structure & Control Systems

Custom Dimming Profile


Intelligent luminaire drivers can be programmed with complex dimming profiles. With customized combinations of time intervals and light levels are possible. This feature does not require any extra wiring.

The period between switching on and switching off is used to activate the preset dimming profile. The customised dimming system generates maximum energy savings while respecting the required lighting levels and uniformity throughout the night.

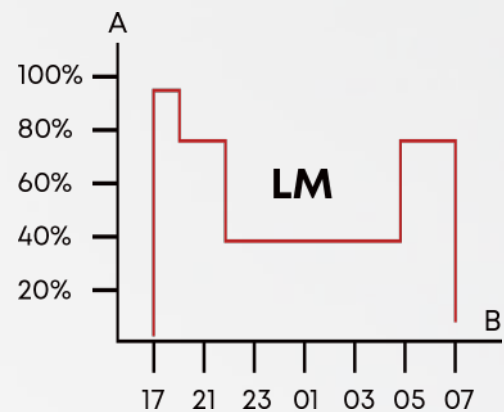

Daylight Sensor / Photocell

Photocell or daylight sensors switch the luminaire on as soon natural light falls to a certain level. It can be programmed to switch on during a storm, on a cloudy day (in critical areas) or only at nightfall so as to provide safety and comfort in public spaces.

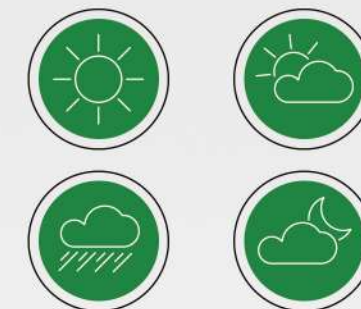


Smart standards. Smarter lighting.

LoRaWAN® Luminaire Controller Zhaga (Optional)

It is an easily installable wireless device for remote control of the LED luminaires. Device is equipped with Zhaga compliant connector and controls the luminaire through DALI or DALI-2 interface. Controller is available now for LoRaWAN®, NB-IoT and LTE-M network. Modern and small design makes it excellent fit to various street lighting modules.

LoRaWAN® Luminaire Controller NEMA (Optional)

LoRaWAN® Luminaire Controller NEMA is a remote control device for LED luminaires equipped with ANSI C136.41 NEMA receptacle. The luminaire is controlled through DALI or 0..10V analog control interfaces, while providing a reliable power interconnect with three robust twist lock contacts.

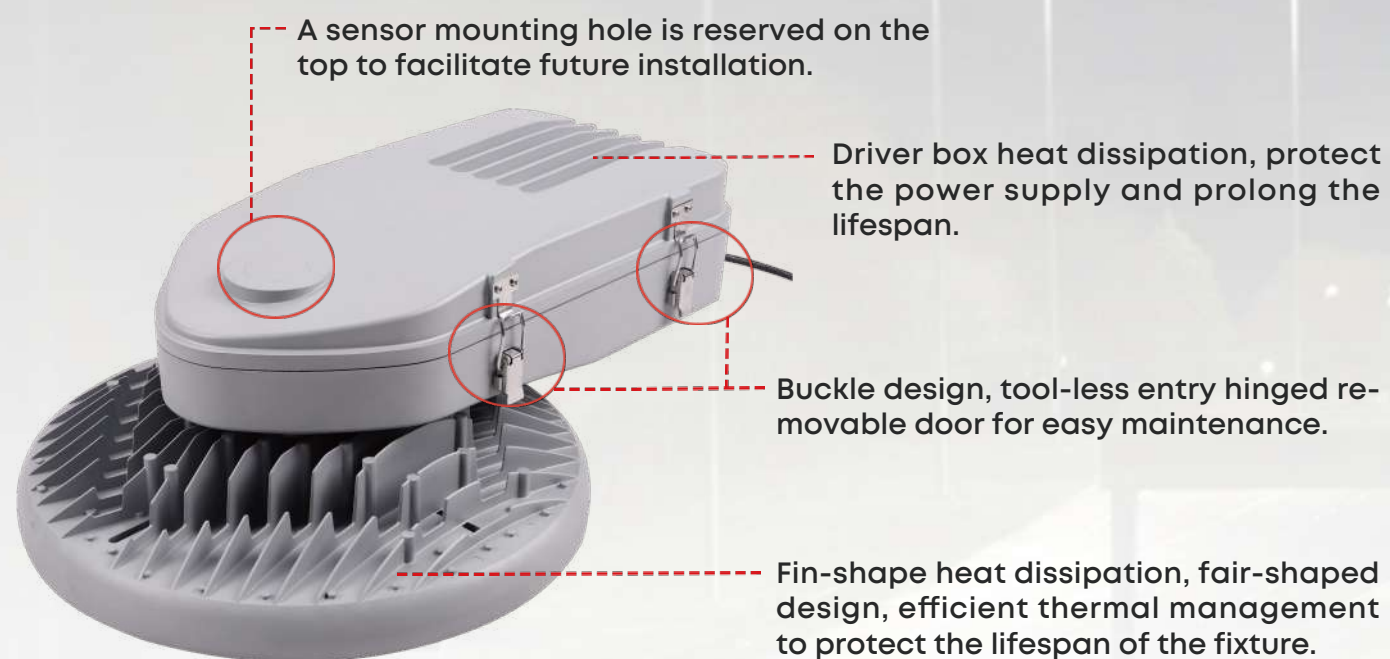

High performance modular LED light engine



Easy wiring & installation




3 or 7-pin receptacle with a variety of controls options



Bolt mounting 3G rating

> Application Reference

- Airport lighting;
- Expressway and freeway interchanges;
- Port facilities;
- Trailer/container yard and rail yard operation area.

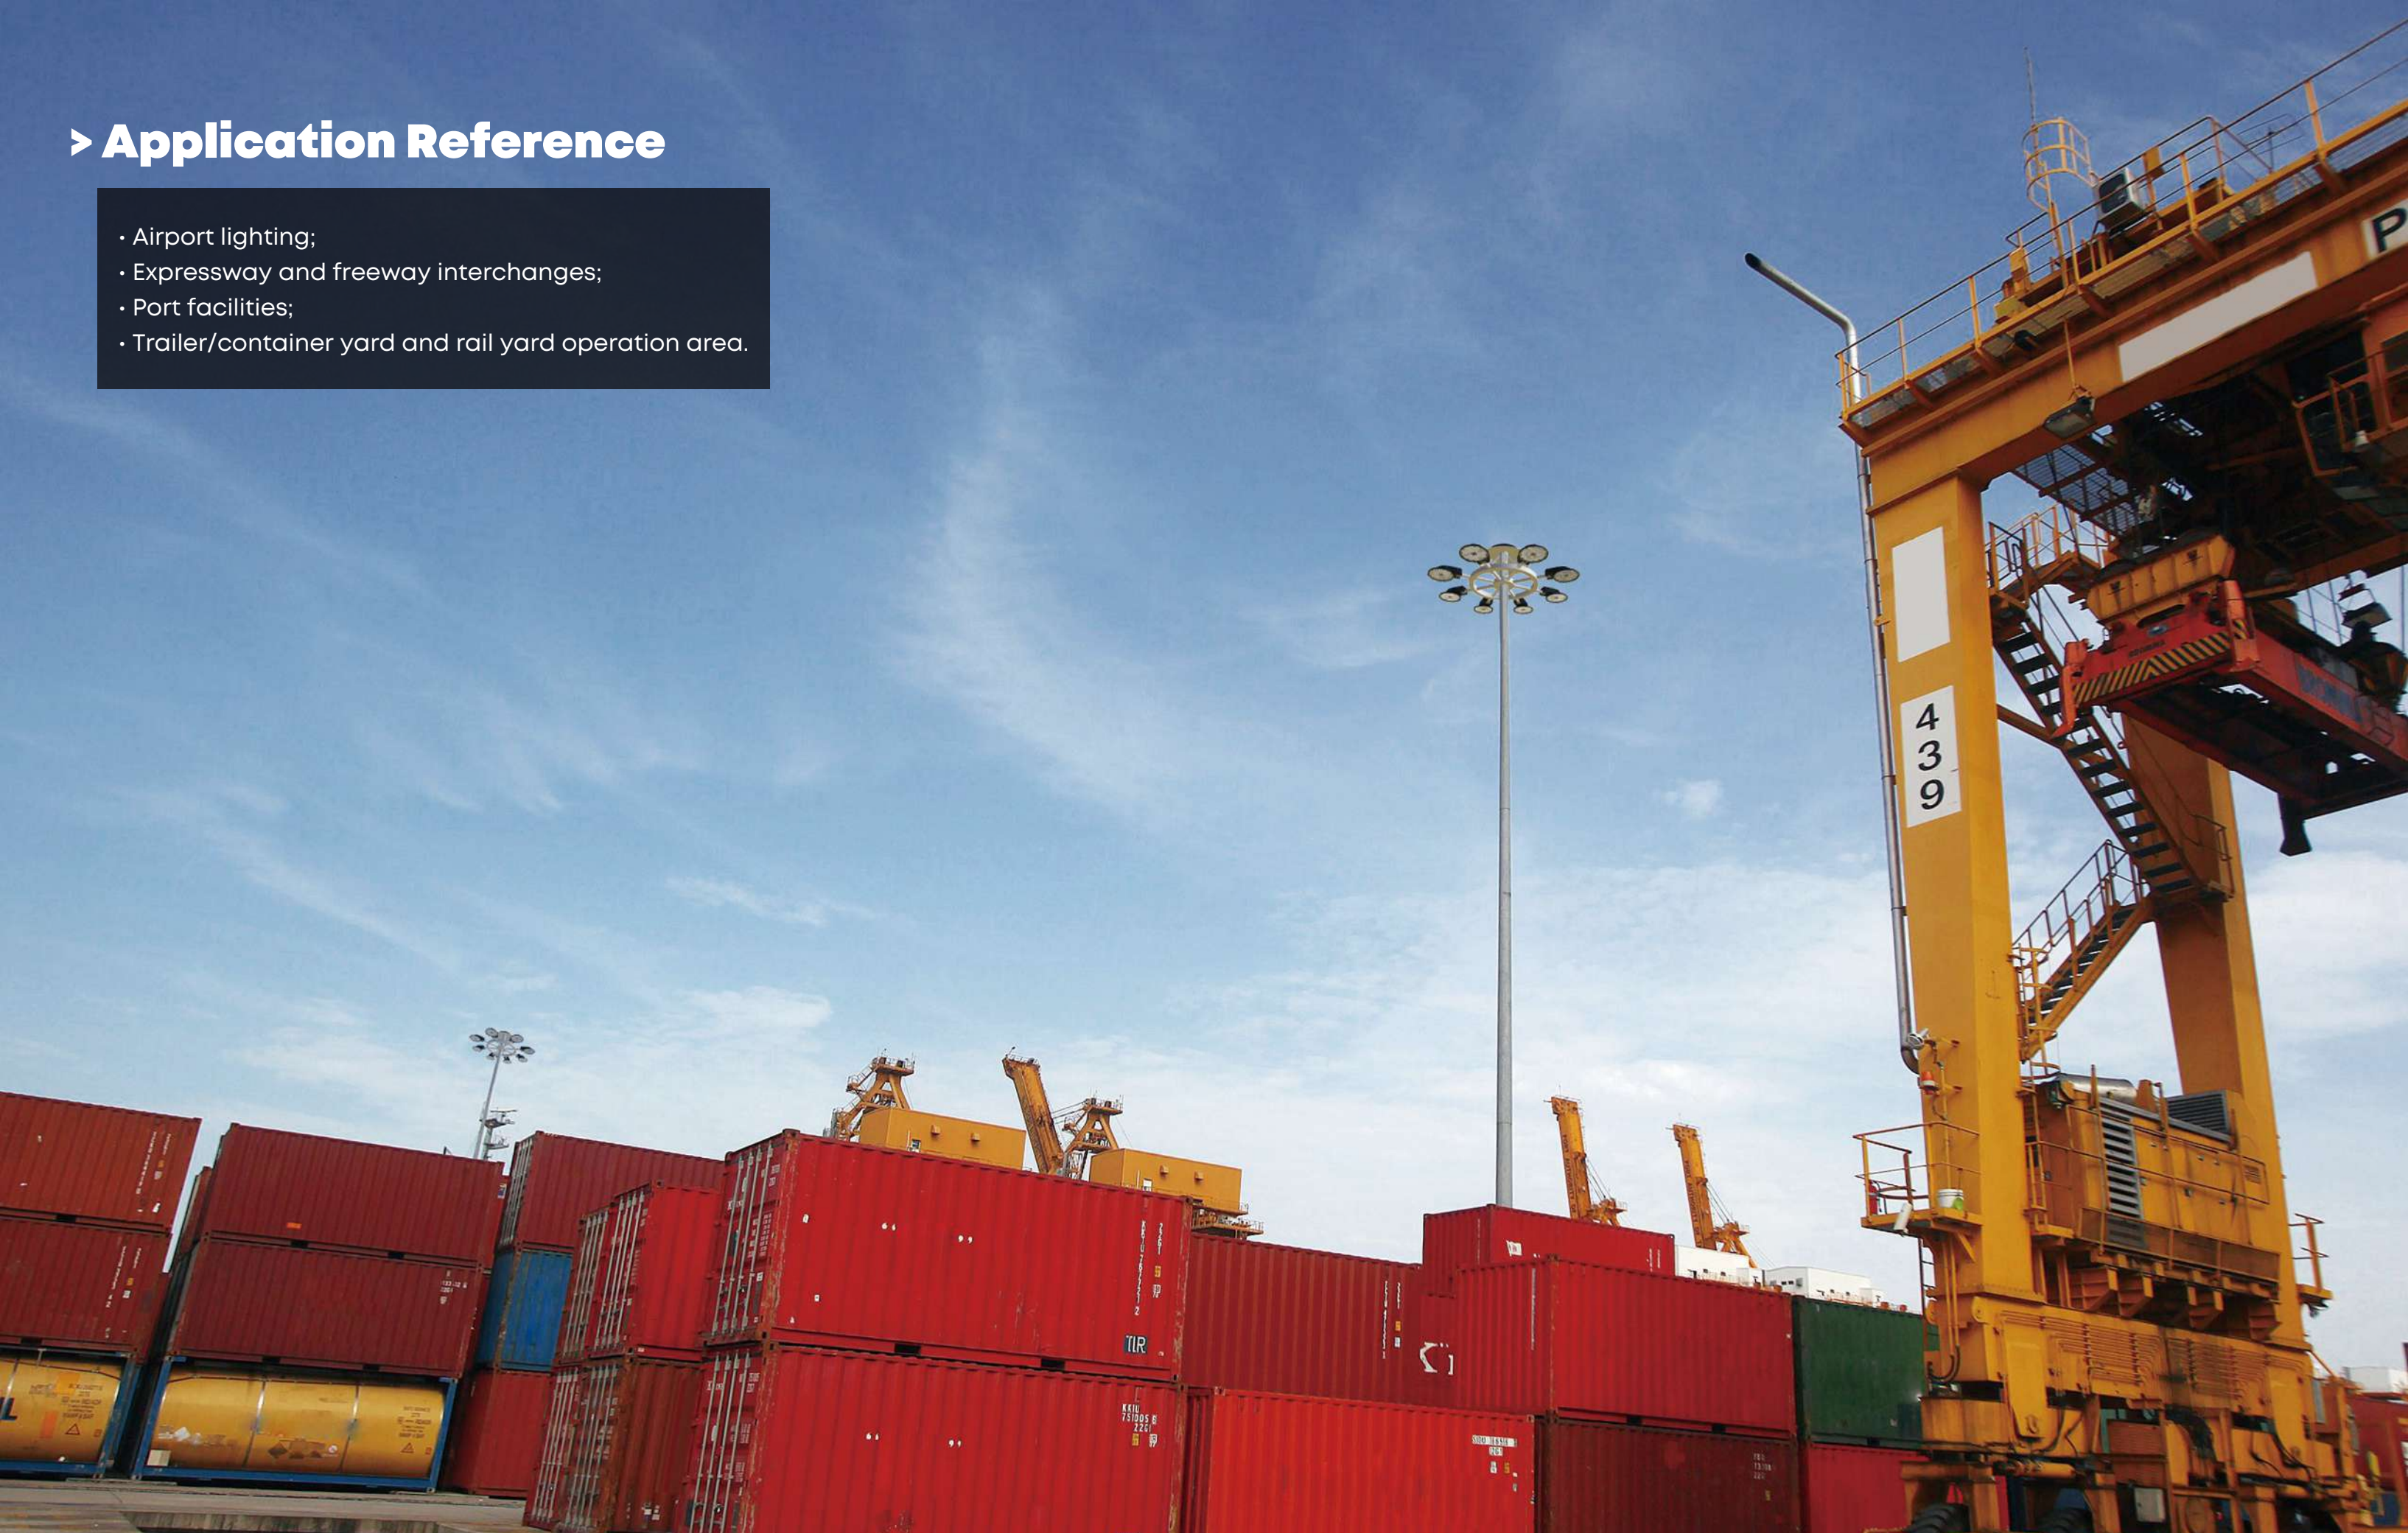

> Project Reference



Parameter Table

Electrical Specifications							
Model	AOK-230WINM	AOK-315WINM	AOK-380WINM	AOK-460WINM	AOK-580WINM	AOK-720WINM	
Power(W)	230 W	315 W	380 W	460 W	580 W	720 W	
Input voltage	Normal Voltage=100-277VAC, High Voltage=277-480VAC, please read *Note-1 before choosing.						
THD	<20%						
PF	>0.90						
Control Option	DALI, 1-10V/ PWM / timer dimming, Nema, Zhaga, Presence detection sensor. 3 or 7 pin receptacle reserved.						
Operating temperature	-40°C to 55°C (-40 °F to 131 °F)			-40°C to 50°C (-40 °F to 122 °F)			
Driver brand	Inventronics or others						
Surge Protection	20KV Standard						
Photometric Specifications							
Efficacy (lm/W, Std. Dev. ±5%)@CCT=4000K, CRI>70Ra	Y22-T203	140 lm/W	135 lm/W	130 lm/W	140 lm/W	135 lm/W	130 lm/W
	Y22-T303	140 lm/W	135 lm/W	130 lm/W	140 lm/W	135 lm/W	130 lm/W
	Y22-T403	*	*	*	*	*	*
	Y22-T503	*	*	*	*	*	*
	S5-T202	155 lm/W	150 lm/W	145 lm/W	*	*	*
	S5-T302	*	*	*	*	*	*
	S5-T402	*	*	*	*	*	*
	S5-T502	175 lm/W	170 lm/W	165 lm/W	175 lm/W	170 lm/W	165 lm/W
	S5-PC-15D	145 lm/W	140 lm/W	135 lm/W	145 lm/W	140 lm/W	135 lm/W
	S5-PC-30D	170 lm/W	165 lm/W	160 lm/W	170 lm/W	165 lm/W	160 lm/W
	S5-PC-60D	175 lm/W	170 lm/W	165 lm/W	175 lm/W	170 lm/W	165 lm/W
	S5-PC-120D	*	*	*	175 lm/W	170 lm/W	165 lm/W
	Luminous flux (lm, Std. Dev. ±5%)@CCT=4000K, CRI>70Ra	Y22-T203	32200 lm	42525 lm	49400 lm	64400 lm	78300 lm
Y22-T303		32200 lm	42525 lm	49400 lm	64400 lm	78300 lm	93600 lm
Y22-T403		*	*	*	*	*	*
Y22-T503		*	*	*	*	*	*
S5-T202		35650 lm	47250 lm	55100 lm	*	*	*
S5-T302		*	*	*	*	*	*
S5-T402		*	*	*	*	*	*
S5-T502		40250 lm	53550 lm	62700 lm	80500 lm	98600 lm	118800 lm
S5-PC-15D		33350 lm	44100 lm	51300 lm	66700 lm	81200 lm	97200 lm
S5-PC-30D		39100 lm	51975 lm	60800 lm	78200 lm	95700 lm	115200 lm
S5-PC-60D		40250 lm	53550 lm	62700 lm	80500 lm	98600 lm	118800 lm
S5-PC-120D		*	*	*	80500 lm	98600 lm	118800 lm
ULOR		= 0%, @ Luminaire inclination 0°					
CCT	INM01:3000K~6500K; iNM03: 2700K~6500K						
CRI	70Ra, 80Ra, 90Ra optional						
Beam angle	iNM01: T2/T3/T4/T5; iNM03: 15D/30D/60D/120D/T5						
Mechanical Specifications							
IP/IK	iNM01: IP66/IK08; iNM03: IP66/IK10						
Vibration resistance	3G/5G vibration rated (please request for details), conform to standard IEC 68-2-6.						
SCx(EPA)	Top: 0.230256m ² (2.48ft ²); Front: 0.105389m ² (1.13ft ²); Left: 0.0720093m ² (0.78ft ²);		Top: 0.297089m ² (3.20ft ²); Front: 0.114723m ² (1.23ft ²); Left: 0.0811475m ² (0.87ft ²);				
Housing/Materials	Heavy-duty die-cast aluminum (EN AC-46100)						
Surface treatment	Anti-UV thermosetting polyester / 80 micron epoxy primer + Anti-UV thermosetting polyester (for extremely corrosive environments).						
Painting	Black, Silver gray, Customized color						
Cable	Pre-wired with a 30 cm cable (Other lengths on request)						
Mounting	Slip fitter						
LED							
LED Manufacturer	LUMILEDS/Seoul						
LED model	Seoul 5050/Seoul Y22						
Working current of single LED (mA)	Y22-T203	317 mA	412 mA	436 mA	339 mA	399 mA	465 mA
	Y22-T303	317 mA	412 mA	436 mA	339 mA	399 mA	465 mA
	Y22-T403	*	*	*	*	*	*
	Y22-T503	*	*	*	*	*	*
	S5-T202	*	*	*	*	*	*
	S5-T302	*	*	*	*	*	*
	S5-T402	*	*	*	*	*	*
	S5-T502	66 mA	90 mA	108 mA	62 mA	78 mA	97 mA
	S5-PC-15D	55 mA	77 mA	92 mA	67 mA	84 mA	105 mA
	S5-PC-30D	34 mA	47 mA	56 mA	40 mA	50 mA	63 mA
	S5-PC-60D	34 mA	47 mA	56 mA	40 mA	50 mA	63 mA
	Lens	Polycarbonate / Tempered glass					
	Others						
Lifespan	L80B10 > 108000 h, @Tq 55°C						
Warranty	5 years in standard, 10 years optional						
Certification	UL/cUL/FCC/CE/ENEC/SAAGS, For other certificates please request						
Product size(mm)	665*468*224mm / 26.2*18.4*8.8 inches	665*468*224mm / 26.2*18.4*8.8 inches	665*468*224mm / 26.2*18.4*8.8 inches	716*570*220mm / 28.2*22.4*8.7 inches	716*570*220mm / 28.2*22.4*8.7 inches	716*570*220mm / 28.2*22.4*8.7 inches	
Net Weight(kg)	INM01: 19.6kg / 43.21 lbs iNM03: 17.0kg / 37.48 lbs	INM01: 19.6kg / 43.21 lbs iNM03: 17.0kg / 37.48 lbs	INM01: 19.6kg / 43.21 lbs iNM03: 17.0kg / 37.48 lbs	INM01: 20.5kg / 45.19 lbs iNM03: 23kg / 50.71 lbs	INM01: 20.5kg / 45.19 lbs iNM03: 24kg / 52.91 lbs	INM01: 20.5kg / 45.19 lbs iNM03: 24kg / 52.91 lbs	
Recommended installation height	20M	25M	30M	35M	40M	45M	
Application field	Suitable for port, railway station, highway express						
Important note	The provided information is solely for reference; the official measurement report holds higher authority.						
** Stands for the lens module is under development, and the specific parameters will be calculated according to the actual project requirement.							

* Note-1: For the power supply in the United States and Canada, in case the input voltage fluctuation ≥240V the High Voltage solution is highly recommended for performance stability. Improper selection will cause damage to the driver or the light.


Ordering Information

AOK								
WATTS	TYPE	VOLTAGE	LED CHIPS	TYPE OF SENSOR	*CCT&CRI	*DISTRIBUTION	MOUNT	HOUSING
230W iNM	01	NV=100-277V	S5=Seoul 5050	00=Without Sensor	2770=2700K 70CRI	15D=15°	A=Slip Fitter	BK=Black
315W iNM	03	HV=277-480V	Y22=Seoul Y22	DV=Dimmable	3070=3000K 70CRI	30D=30°		SL=Silver Gray
380W iNM				PH=Photocell	4070=4000K 70CRI	60D=60°		
460W iNM					5070=5000K 70CRI	120D=120°		
580W iNM					5770=5000K 70CRI	T2=T203		
720W iNM					6570=6500K 70CRI	T3=T303		
					2780=2700K 80CRI	T4=T403		
					3080=3000K 80CRI	T5= T503		
					4080=4000K 80CRI			
					5080=5000K 80CRI			
					5780=5700K 80CRI			
					6580=6500K 80CRI			


*CCT&CRI: iNM01: 3000K~6500K CCT; iNM03: 2700K~6500K CCT; *DISTRIBUTION: iNM01: T2M/T3M/T4M/T5; iNM03: 15D/30D/60D/120D/T5

Photometry

iNM01 VERSION PHOTOMETRY

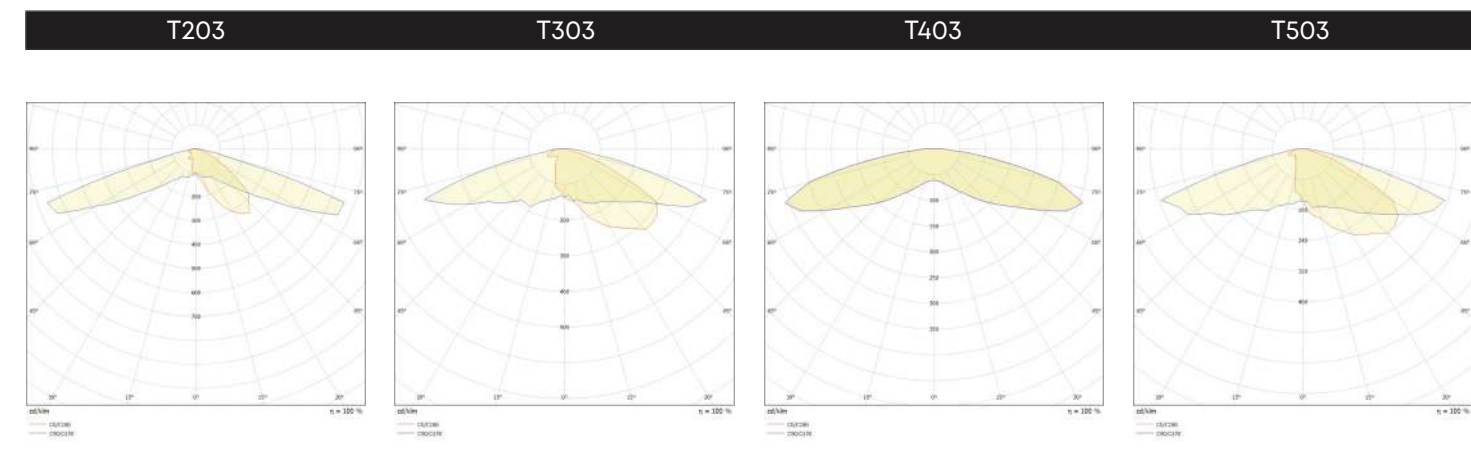

iNM03 VERSION PHOTOMETRY

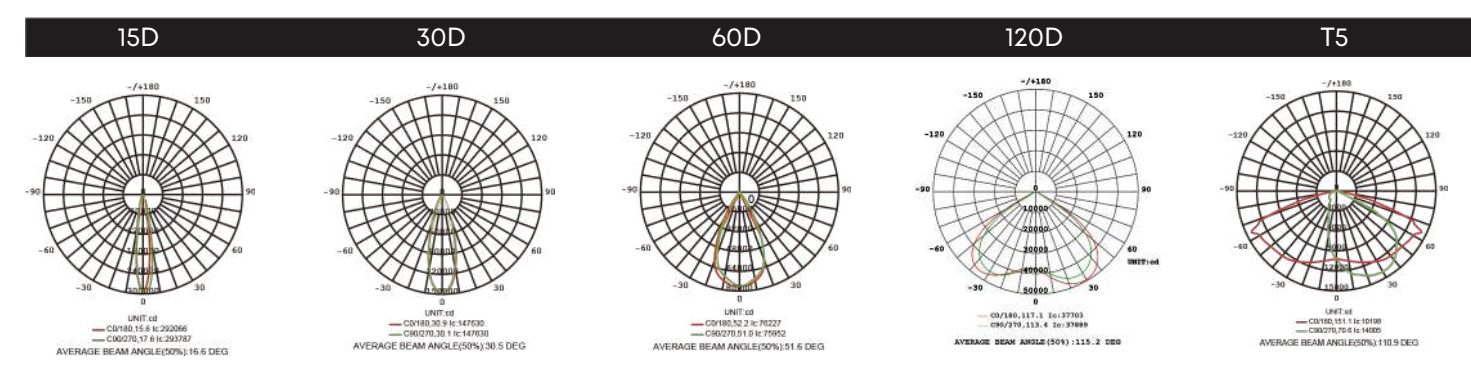


All published Luminaire photometric testing performed to IESNA LM-79-08 standards by a NVLAP accredited Laboratory.


INM Series Specification Sheet

*Due to the constant improvements in product development, individual parameters might change. Please refer to our sales or R&D team for most up-to-date content as specifications are subject to change without notice.

Illuminance Diagram

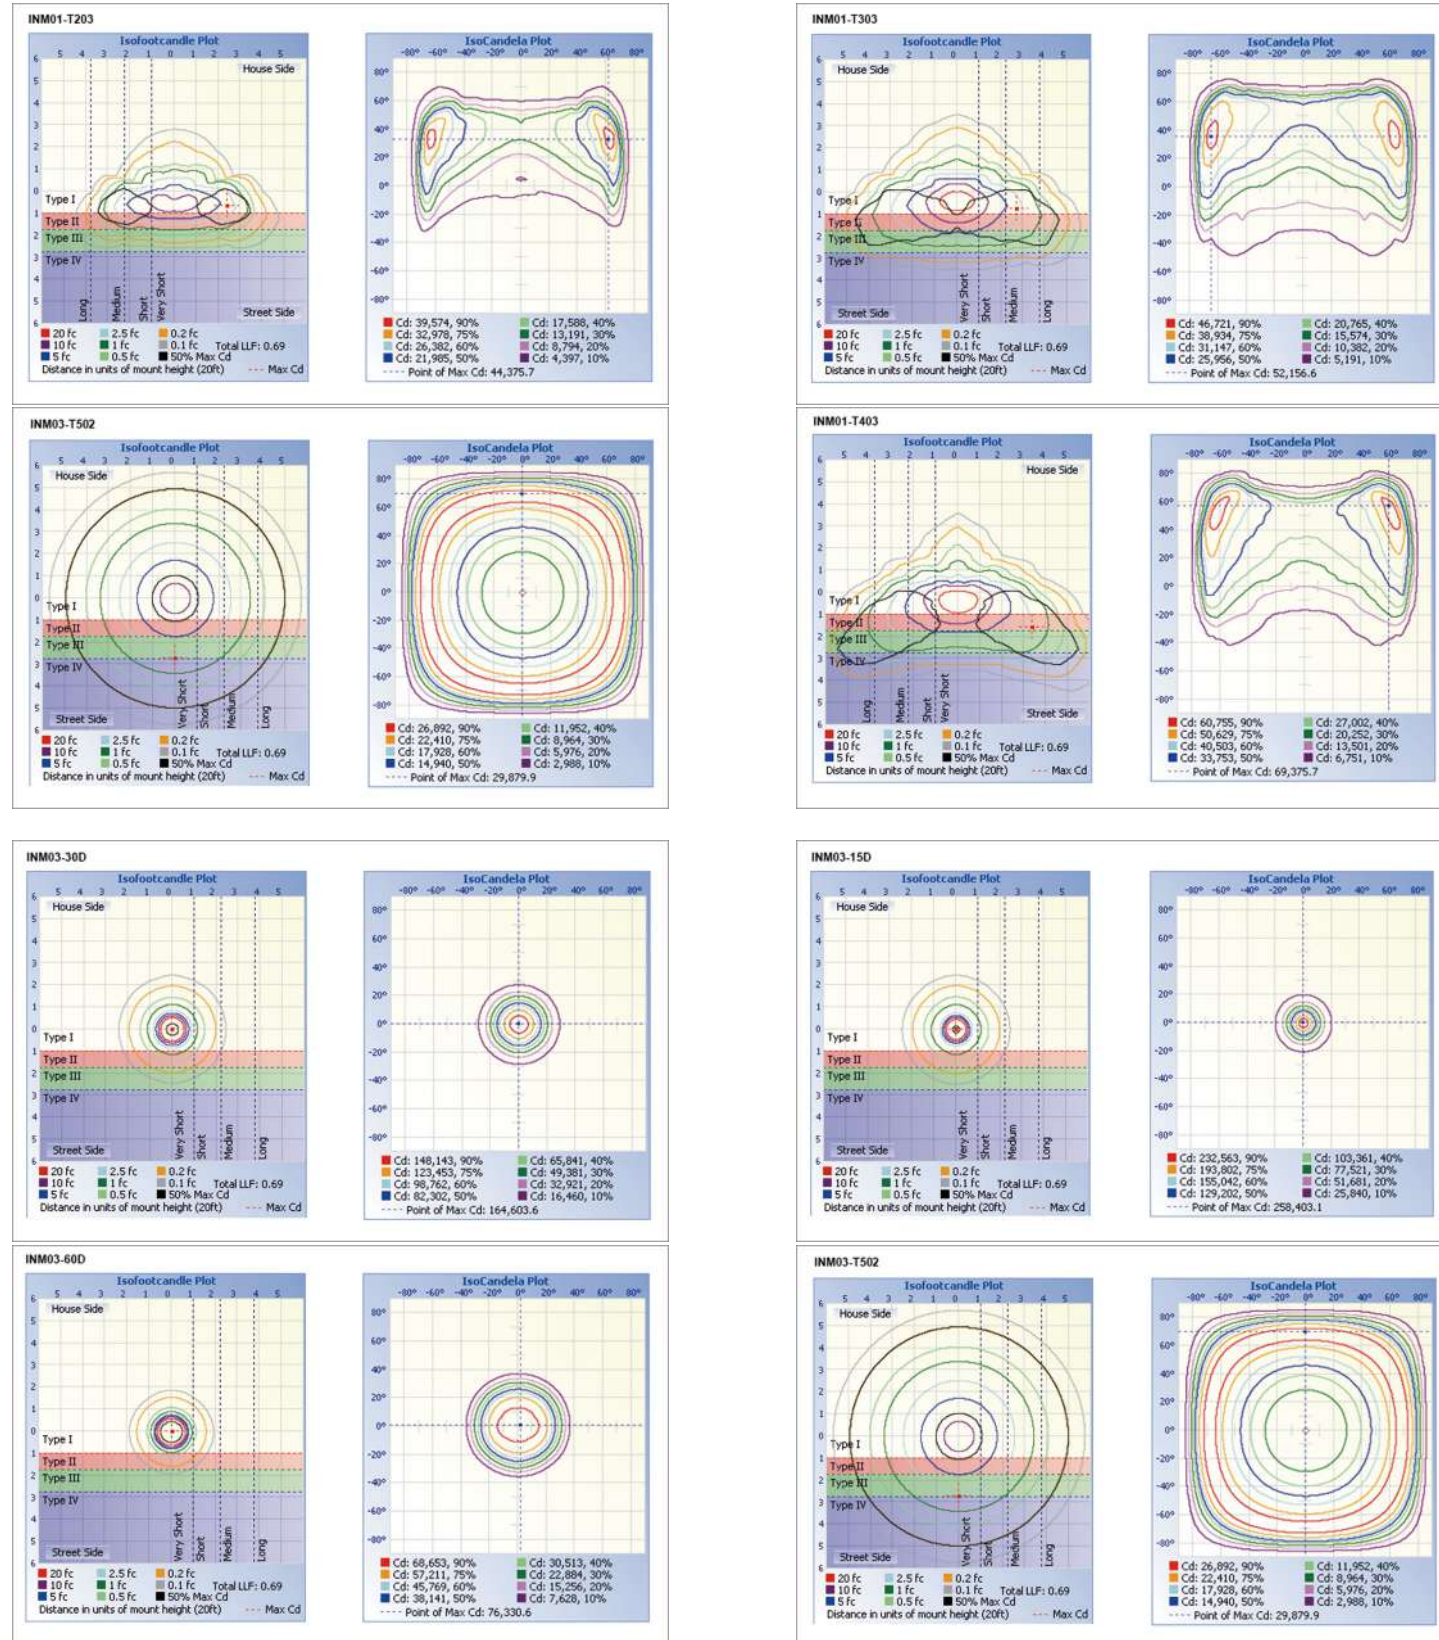

Fixture Dimensions

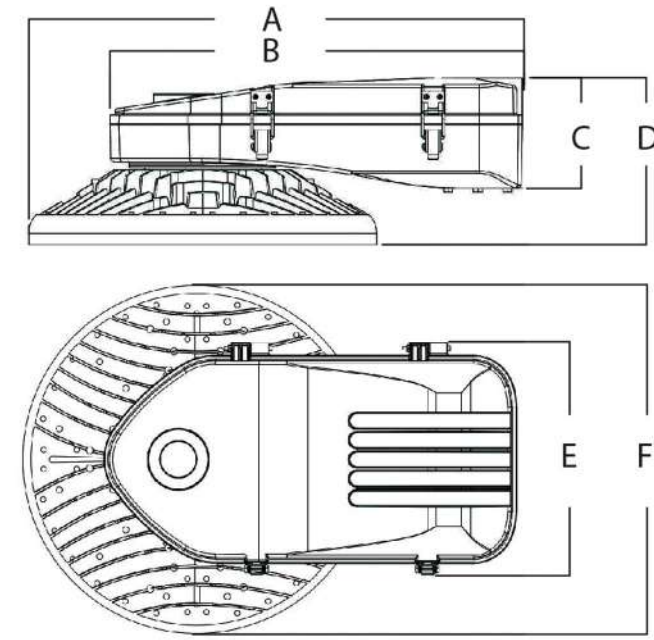

	A	B	C
230W	66.5cm/26.18'	55.7cm/21.93'	14.9cm/5.87'
315W	D (INM)	D (INM02)	E
380W	22.4cm/8.8'	21.4cm/8.4'	29.8cm/11.73'
			46.8cm/18.43'
460W	A	B	C
580W	71.6cm/28.19'	55.7cm/21.93'	14.9cm/5.87'
720W	D (INM)	D (INM02)	E
	22.0cm/8.6'	21.1cm/8.3'	29.8cm/11.73'
			57.0cm/22.44'

Mounting & Accessories



- Heavy-duty die-cast aluminum housing, anti-corrosion.
- Lid-latch driver box design & tool-less entry for easy maintenance.
- Side entry and bolt mounting installation, easy & fast.
- 3G/5G vibration rated (please request for details), conform to standard IEC 68-2-6.

Control Options



*As the products are upgraded, the accessories may differ from those described in the pictures. Please consult with our sales team for updated details and order separately.



Illuminate Your Future

5 **10** **WARRANTY**
5 Year Limited Warranty,
10 Year Preferred Warranty.
Please consult with our sales for detailed agreement.

wally@aokledlight.com
www.aokledlight.com
+1 626-986-4050 (US)
+86 755 2357 9148 (CN)

Manufacturing: Building 1 & 4, St. George's Science and Technology Industrial Park, Shajing Street, Shenzhen, China, 518124.
Fuzhou HQ: Room 301, Yujing Business Center Zone 1, No. 12 Baihuazhou road, Cangshan district, Fuzhou, China, 350007
NorthAmerica HQ: 18541 E Gale Ave, City of Industry, CA91748 USA

Copyright ©2023 AOK LED LIGHT CO., LTD. All Right Reserved.