

Installation Guide

This procedure is designed as an installation aid. Skilled tradespeople that are familiar with general construction and electrical installation techniques should perform the installation. Licensed electricians should provide electrical installation connections. Installations and connections should be done in accordance with all national and local codes and permits. In no way is this document intended to construe warranty or fitness of use of the products described, nor is it intended to provide safety instruction for those installing the product.

WARNING

Before proceeding with installation or service maintenance of this product:

- Disconnect power to reduce electrical shock risk.
- Review the entire Installation Guide.
- Inspect this properly packaged product for any damage that may have occurred during transit.
- Verify product application complies with manufacturer design recommendations.
- Verify the availability of necessary tools and incidental material.
- Verify applicable code requirements. Field assembly and installation are subject to acceptance by local inspection authority.
- Appropriate safety equipment to be determined by end user, per applicable safety standards and precautions.

-Installation Tools Reference - Packing List:




5 # hex wrench



8 # hex wrench

Note: Installation tool is not included with product.

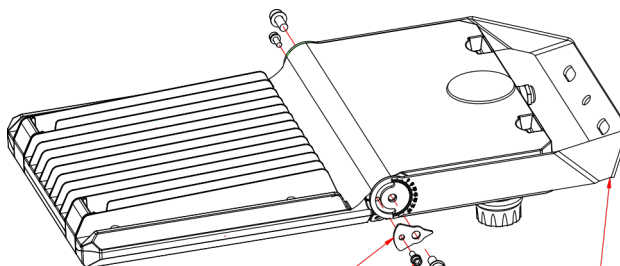

①

②

③

④

①



Gasket
1PCS

②



M5*15mm combination
screw 2PCS

③



M8*20mm combination
screw 2PCS

④


Bracket

A



Step 1: Drill two holes in the wall or ceiling.
Refer to diagram E for the hole dimensions.


B



Step 2: Use a hammer to drive the screws into the wall or roof.

C


Torque ≥ 8.5 N·M
until the screws are fully tightened.

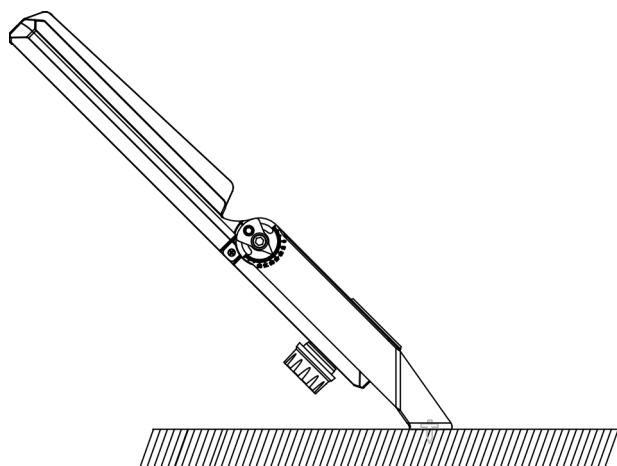

Step 3: Secure the lighting fixture to the wall or roof.

D


Adjust to the desired angle
and tighten the screws with
a torque ≥ 5 N·M until locked.

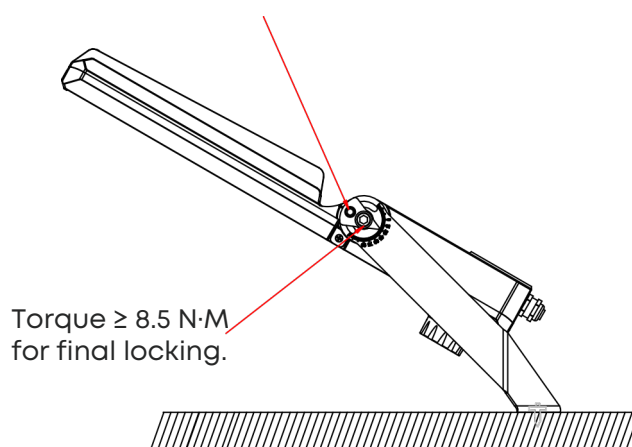

Torque ≥ 8.5 N·M
for final locking.

Step 4: Loosen the screws to adjust the fixture to the desired angle.


E

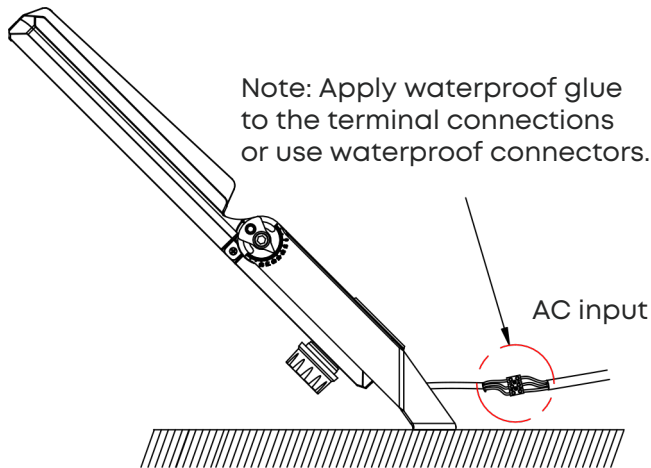


Step 5: Connect the cable from the lighting fixture to the municipal power lines, as shown in diagrams F or G.

Bracket installation dimensions:


50-100W

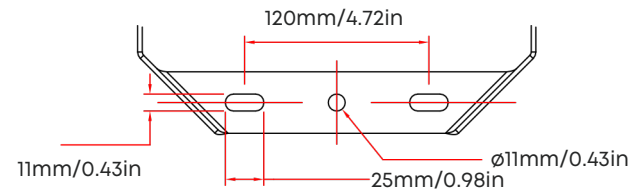


150-240W

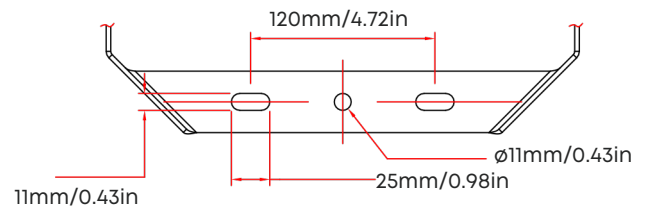

300-500W

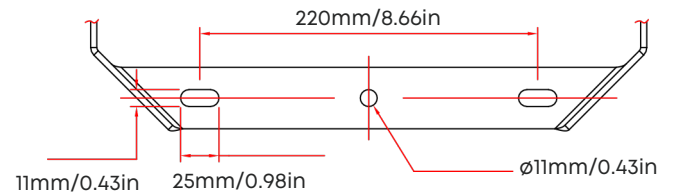


F

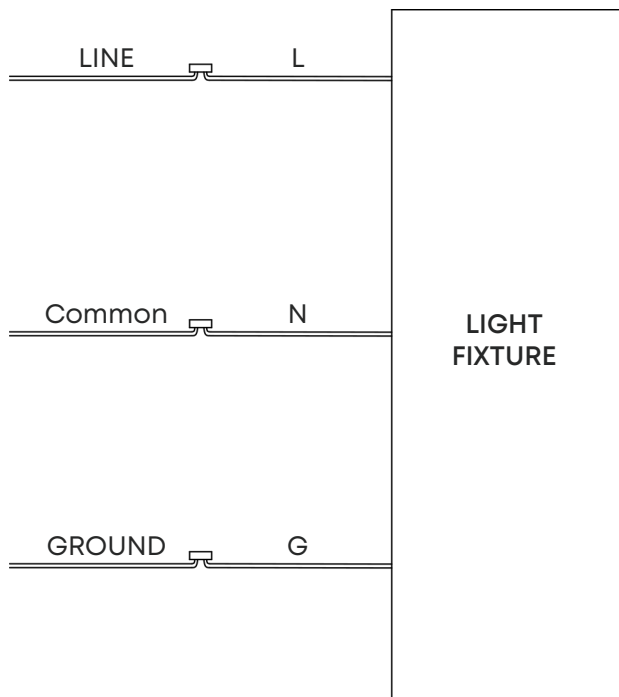

G

0-10V Dim Wiring

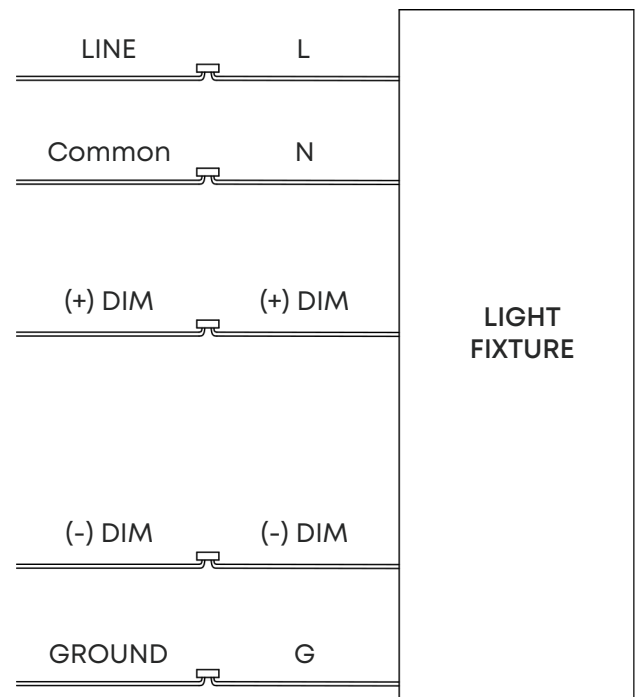

If replacing components is required, follow the steps below.
Note: Issues caused by improper operation are not covered under the after-sales service.

Instructions for Opening and Closing the Top Cover and Driver Cover:

