



• Support Municipal Electricity Supply

ISC AMENITY SOLAR LIGHT
10W/20W/30W





100+ Patent Certificates
\$1,000,000+ Annual Energy Saving
10,000+ Projects Successfully Installed

**Better Performance
Starts From Better Lighting**
www.aokledlighting.com

> Features of SC Series

• The inspiration for the SC series LED solar light's design draws from art, seamlessly integrating the most energy-efficient components: solar panels, LED lights, and LiFePO4 batteries. Enhanced by the controller and MPPT technology, it achieves the dual goals of high brightness with minimal energy usage, prolonged lifespan, and simplified upkeep. Moreover, its sleek and streamlined appearance harmonizes effortlessly with the surroundings, contributing to the creation of an exquisite urban landscape.

- Power range: from 10W to 30W;
- Municipal electricity supply optional;
- Using LiFePO4 batteries, with the capability to charge and discharge for over 2000 cycles, offers a safer and relatively smaller size and longer lifespan;
- Continuously work 2-3 rainy days under intelligent mode;
- Die-cast aluminum fixture housing ;
- UV stabilized polyester powder paint finish for durability and corrosion resistance, C5-grade painting;
- Mounting options: Post Top installation;
- Streamlined design to reduce wind resistance;
- Optical systems maintain an IP65 rating;
- ULOR=0%, no up light pollution;
- MPPT intelligent controller, features an intelligent energy-saving mode with selectable levels, extending the lighting duration and automatically adjusting brightness.

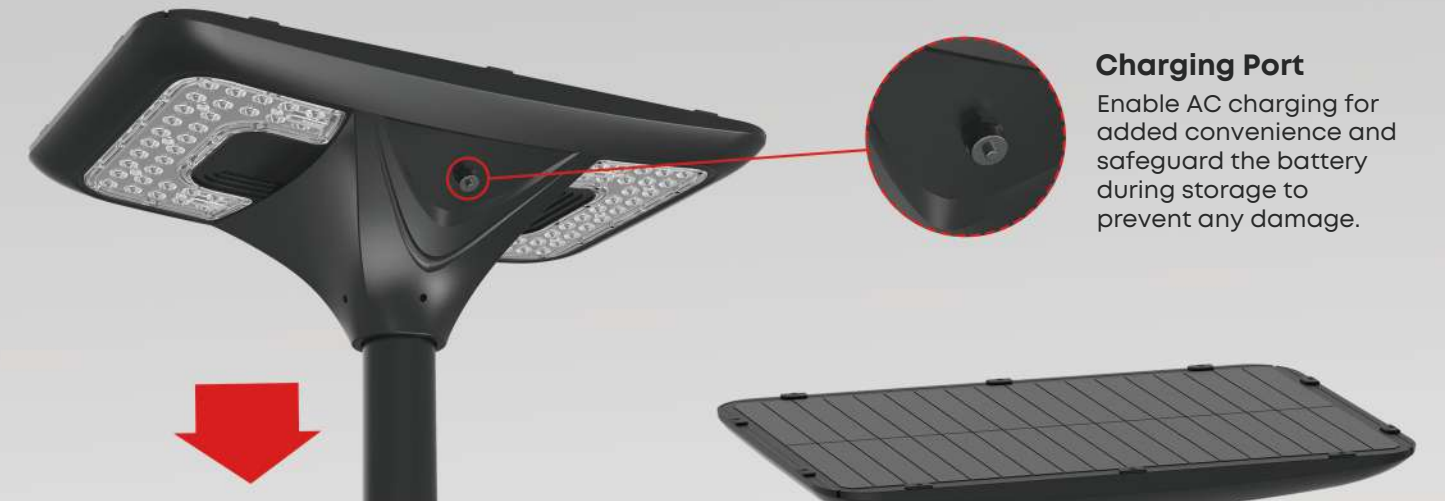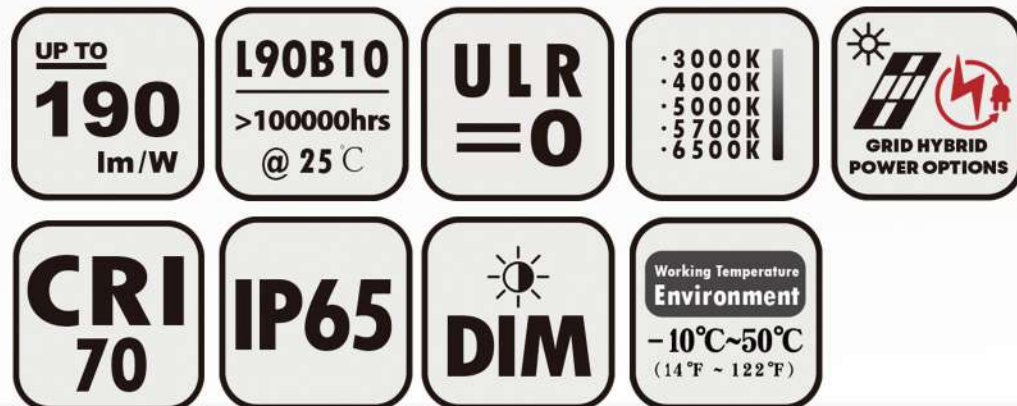

Charging Port
Enable AC charging for added convenience and safeguard the battery during storage to prevent any damage.

KEY ADVANTAGES

- 
• Monocrystalline Silicon Solar Panel
25 years lifespan ensures durability
- 
• High Lumen Output
High-performance LEDs efficacy >190lm/W
- 
• Long Lifespan Li-ion Battery & MPPT
Intelligent temperature control guarantees prolonged operation and safeguards >2000 times battery lifespan
- 
• Grid Hybrid & Main Power Optional
Grid Hybrid or Main Power Only optional, increased adaptability to fulfill project demands
- 
• Intelligent Lighting Control
Smart time-based lighting control, aligning with lighting requirements flexibly.

> Photometrics Design

Lumen efficiency >190lm/W
achieve higher illumination



High Efficiency




Long Lifespan



Less Calorific Value




Low Light Decay



- The light engine takes advantage of the latest generation of mid-power LEDs and dedicated optics for professional applications.
- 5050 LED chips provide lighting solutions from high-level special lights to very cost-effective but excellent quality luminaires.

Photometry Design



TYPE V (T502)


Pedestrian cityscape requires an architectural luminaire to enhance the site by day and to provide visual comfort and security by night.

SC series offers precise optical control up to 190 lumens per watt with distinct optimally designed distributions.

Other optics types customizable.

Working Way

Municipal Electricity Complementary Solution Optional

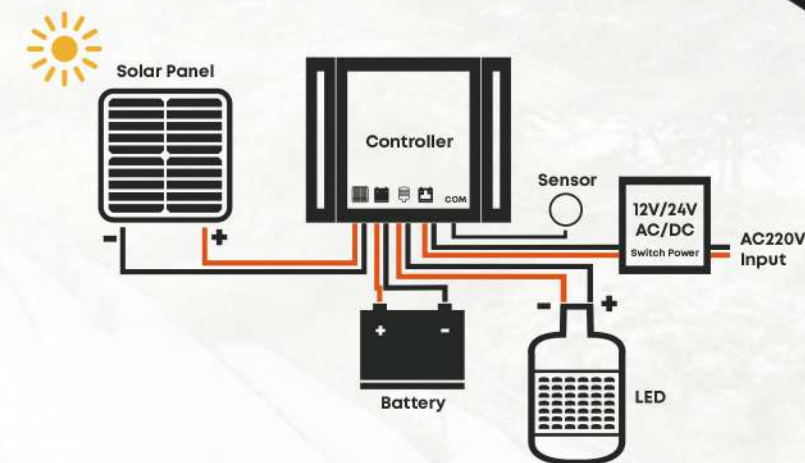


Standard Configuration Version

Municipal Electricity Complementary Solution, the power supply is placed internal, and it is easy to replace.

When the battery voltage is lower than the set value, the power supply will switch to mains power, and when the voltage is higher than the set value, it will switch to battery power. The standard configuration does not include mains complementary function.

Advantages of controller

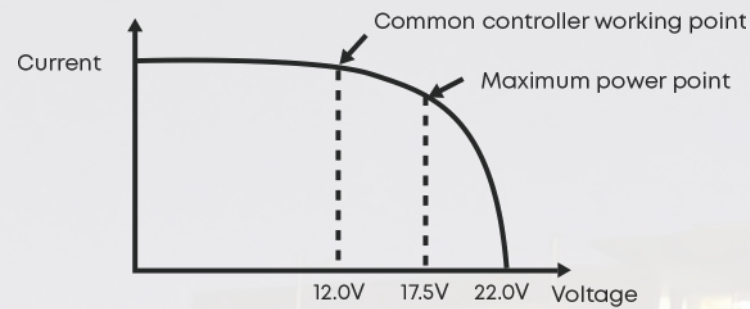


(take 12V battery system as an example)

- 1) Moving Track MPPT maximum power tracking technology is adopted to improve the tracking efficiency and speed by more than 20%;
- 2) UltraGreen power control technology with extremely low static power consumption and sleep current;
- 3) 10 time-periods programmable load power/time control;
- 4) Multiple intelligent power modes can be selected, and the load power can be automatically adjusted according to the battery power;
- 5) Multiple protection functions such as battery /PV reverse connection protection, LED short circuit/open circuit/power limit protection;
- 6) Aluminum metal housing, IP67 waterproof rating, can be used in a variety of harsh environments
- 7) Extensible IoT remote communication monitoring function;

Detection distance

Remote control distance 5-8 meters, installation height and environment and other factors will affect the controller sensitivity, please refer to the actual field.

Note: Please do not place 2 or more lights within 12 meters at the same time while using the remote controller, receiving or sending may fail.

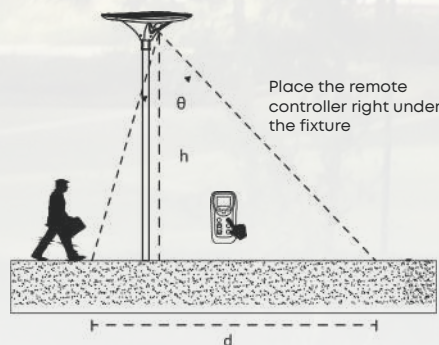

Inductive Type (alternative)	θ-Angle (X-axis rotation: 360°)	h (Height of lamp rod)	d (Inductive width)
IR (Infrared)	60°	6-8m	6-10m
WB (Microwave)	65°	6-10m	7-10m

*Remote control is optional

> Application Reference

- Road & street lighting
- Residential area lighting
- Garden, parks & perimeter lighting
- Parking lot lighting
- Industrial and commercial park lighting
- Railway & station side lighting
- Riverside & jogging track lighting





Parameter Table

Electrical Data			
Model	AOK-SC10	AOK-SC20	AOK-SC30
Power	10W	20W	30W
Control function	MPPT intelligent controller		
Standard working mode	2H: Detected-100%, None-30%; 3H: Detected-70%, None-10%; 7H: Detected-40%, None-10%		
Photometric Data			
LED model	5050, custom on request		
Efficacy (lm/W, Std Dev ±5%) (CRI 70Ra, 4000K)	190lm/W	190lm/W	190lm/W
Luminous flux (lm, Std Dev ±5%) (CRI 70Ra, 4000K)	1900lm	3800lm	5700lm
Lens	Polycarbonate		
CCT	3000K, 4000K, 5000K, 5700K, 6500K		
CRI	70Ra		
Mechanical Data			
IP Rating	IP65		
Housing	Aluminum		
Mounting	Round pole (Ø60mm)		
Painting	Black, custom color on request, C5-grade painting, resistance to extreme climates.		
Configuration Data			
Solar Panel	18V, 35W	18V, 35W	18V, 35W
Battery voltage(AH)	12.8V 6AH	12.8V 12AH	12.8V 18AH
Li-ion Battery(WH)	76.8WH	153.6WH	230.4WH
Charing Time	2-3Hrs	4-5Hrs	7-8Hrs
Run Time(@full power)	6.9Hrs	6.9Hrs	6.9Hrs
Battery lifespan	>2000 times cycle		
Ambient & Storage Temperature	-10°C to 50°C (14°F to 122°F) / -20°C~45°C (-4°F to 113°F)		
Maximum Autonomy	Operate 2~3 rainy days under intelligent model.		
Others			
SCX(EPA)	Top View - 0.249m² (2.68ft²); Front View - 0.045m² (0.48ft²); Side View - 0.042m² (0.45ft²)		
Certification	FCC / CE / RoHS (The company is ISO 9001 and ISO 14001 certified.)		
Product Size	570*370*180 mm / 22.5*14.6*7.1 inches		
Carton Size	645*445*240 mm / 25.4*17.5*9.5 inches		
Net Weight	4.8kg / 10.58lbs	5.4kg / 11.90lbs	6kg / 13.22lbs
Gross Weight	6.6kg / 14.55lbs	7.2kg / 15.87lbs	7.8kg / 17.20lbs
Warranty	3 years (Warranty extension on request)		
Recommend installation height	3-4m	3-6m	5-7m
Application field	Road & street, residential area, garden, parks, parking lot, industrial and commercial parks, railway & station side, riverside & jogging track		
Storage instruction	For long-term storage, it is advisable to first fully charge the battery, then discharge it for 2 to 3 hours. This should be done every 3 months to prevent battery damage.		
Important note!	The provided information is solely for reference; the official measurement report holds higher authority.		

Ordering Information

AOK	MODEL	VOLTAGE	LED CHIPS	TYPE OF SENSOR	CCT&CRI	DISTRIBUTION	MOUNT	HOUSING
SC10	DC=Solar	A5=5050	00=Without Sensor	3070=3000K 70CRI	T5=TYPE V	A=Post Top	SL=Silver	
SC20	HB=Hybrid		PIR=PIR Sensor	4070=4000K 70CRI			BK=Black	
SC30	NV=Grid		MS=Microwave Sensor	5070=5000K 70CRI				
				5770=5700K 70CRI				
				6570=6500K 70CRI				

Dimension

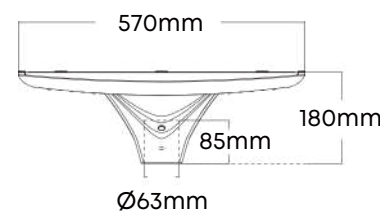


Housing Color




Photometry

Type V

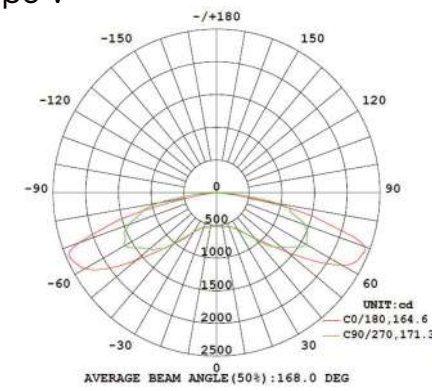


Illuminance Diagram

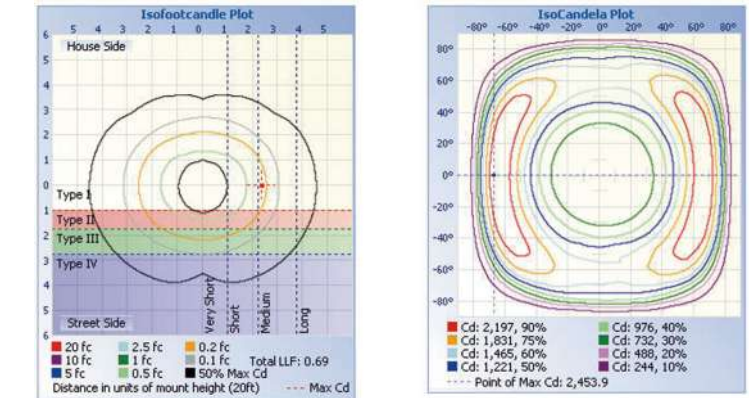


Autonomy Control Reference


2H-Detected-100%, None-30%;
3H-Detected-70%, None-10%;
7H-Detected-40%, None-10%

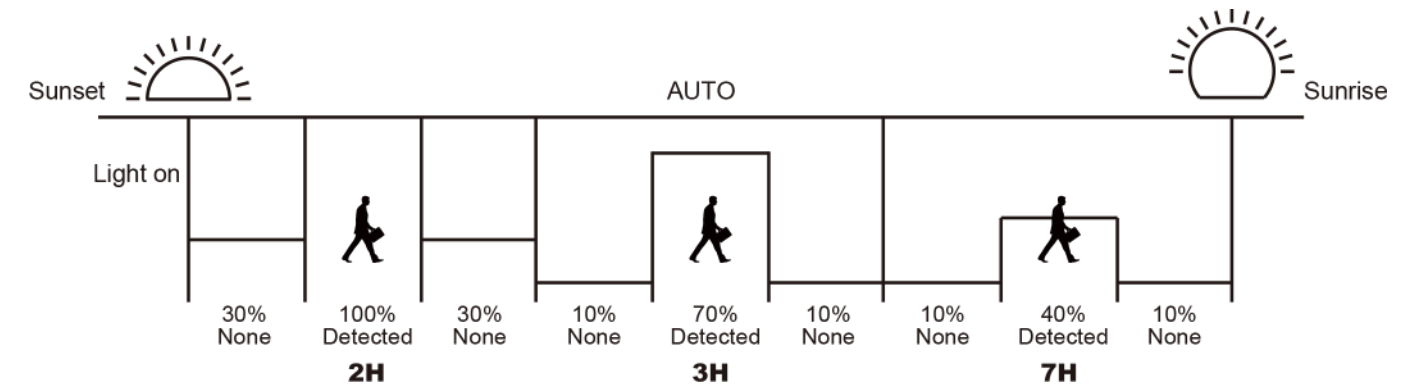


100% CONSTANT MODE
100% brightness from dusk to dawn.

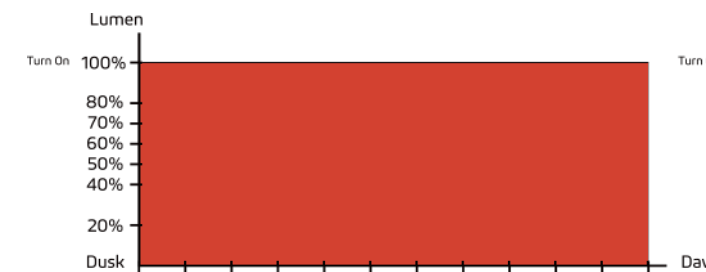

70% CONSTANT MODE
70% brightness from dusk to dawn.

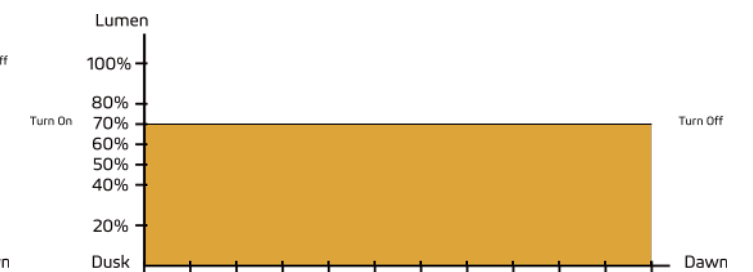

40% CONSTANT MODE
40% brightness from dusk to dawn.

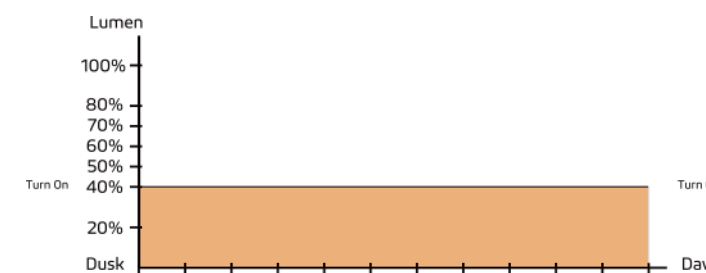

SC Series Specification Sheet

*Due to the constant improvements in product development, individual parameters might change. Please refer to our sales or R&D team for most up-to-date content as specifications are subject to change without notice.

wally@aokledlight.com
+1 626-986-4050 (US)
+86 755 2357 9148 (CN)

©2023 AOK LED LIGHT CO., LTD. All Right Reserved.





Illuminate Your Future



WARRANTY

3 Year Limited Warranty,
Warranty extension on request.
Please consult with our sales for detailed agreement.

wally@aokledlight.com
www.aokledlight.com
+1 626-986-4050 (US)
+86 755 2357 9148 (CN)

Manufacturing: Building 1 & 4, St. George's Science and Technology Industrial Park, Shajing Street, Shenzhen, China, 518124.
Fuzhou HQ: Room 301, Yujing Business Center Zone 1, No. 12 Baihuazhou road, Cangshan district, Fuzhou, China, 350007
NorthAmerica HQ: 18541 E Gale Ave, City of Industry, CA91748 USA

Copyright ©2023 AOK LED LIGHT CO., LTD. All Right Reserved.