

TEST REPORT

LED Flood Light

Test Model:AOK-600WFLD-NV-L2-6570-30D-T

Additional Models: See "General product information"

Report Number : LCSB04216058S

Applicant : AOK Industrial Company Limited
Address : 1/F of 1#Building, East Block of 3/F of Building 1,And 2/F of Building 4, ST George's Science and Technology Industrial Park, Northside of Xinyu Road,Xiangshan Community, Xinqiao Street Baoan District,518000 Shenzhen, Guangdong, CHINA

Manufacturer : AOK Industrial Company Limited
Address : 1/F of 1#Building, East Block of 3/F of Building 1,And 2/F of Building 4, ST George's Science and Technology Industrial Park, Northside of Xinyu Road,Xiangshan Community, Xinqiao Street Baoan District,518000 Shenzhen, Guangdong, CHINA

Prepared by : Shenzhen Southern LCS Compliance Testing Co., Ltd.
Address : 101-201, Building 39, Xialang Industrial Zone, Heshuikou Community, Matian Street, Guangming District, Shenzhen, China

Date of receipt sample : April 21, 2026

Date of test : April 22, 2026

Date of issue : April 22, 2026

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full. without prior written permission of the company, The report would be invalid without specific stamp of test institute and the signatures of approver.



TEST REPORT

Client:	AOK Industrial Company Limited		
Address:	1/F of 1#Building, East Block of 3/F of Building 1, And 2/F of Building 4, ST George's Science and Technology Industrial Park, Northside of Xinyu Road, Xiangshan Community, Xinqiao Street Baoan District, 518000 Shenzhen, Guangdong, CHINA		
Manufacturer:	AOK Industrial Company Limited		
Address:	1/F of 1#Building, East Block of 3/F of Building 1, And 2/F of Building 4, ST George's Science and Technology Industrial Park, Northside of Xinyu Road, Xiangshan Community, Xinqiao Street Baoan District, 518000 Shenzhen, Guangdong, CHINA		
Brand Name:			
Product Description:	LED Flood Light		
Models:	See model list		
Rating:	See model list		
Test item:	IK08 Test		
Method:	IEC 62262:2002+A1:2021		
Test result*:	Pass		
Date of sample receipt:	Date of Test:	Date of Issue:	Classification:
2026/04/21	2026/04/22	2026/04/22	Commission Test
Testing Laboratory: Shenzhen Southern LCS Compliance Testing Co., Ltd. 101-201, Building 39, Xialang Industrial Zone, Heshuikou Community, Matian Street, Guangming District, Shenzhen, China			
Test von/Test by:	Check von/Check by:	Genehmigt von/Approved by:	
 Yeoh Zhang/ Project Engineer	 Torres He/ Director	 Jesse Liu/ Manager	
<i>Remark: The duplication of this report or parts of it and its use for advertising purposes is only allowed with permission of the testing laboratory. This report contains the result of examination of the product sample submitted by the applicant. A general statement concerning the quality of the products from the series manufacturer cannot be derived therefore.</i>			

General remarks:

1. The test results presented in this report relate only to the object tested.
2. This report shall not be reproduced, except in full, without the written approval of the Issuing Testing Laboratory. The authenticity of this Test Report and its contents can be verified by contacting the Testing Laboratory, responsible for this Test Report.
3. The general information of applicant and manufacturer (such as the name and address), product name, model/type reference, trademark and other similar information contained in this report are all provided by the applicant, the laboratory is not responsible for verifying its authenticity.
4. No decision rule is specified by the IEC standard, when comparing the measurement result with the applicable limit according to the specification in that standard. The decisions on conformity are made without applying the measurement uncertainty ("simple acceptance" decision rule, previously known as "accuracy method").

Modified Information

Version	Report No.	Revision Date	Summary
--	LCSB04216058S	/	Original Version

General product information:

- All models are with the similar mechanical and electrical construction except the internal component.
- Unless otherwise specified, the model AOK-600WFLD-NV-L2-6570-30D-T was chosen as representative model to perform all test.

Parts	Material	Thickness(mm)
LED cover	PC	12.2mm
Metal enclosure	ADC12	3mm

Model list :

Model	Rating
AOK-600WFLD-NV-XX-XXYY-BN-P	100-277V~, 50/60Hz, 600W
AOK-450WFLD-NV-XX-XXYY-BN-P	100-277V~, 50/60Hz, 450W
AOK-400WFLD-NV-XX-XXYY-BN-P	100-277V~, 50/60Hz, 400W
AOK-300WFLD-NV-XX-XXYY-BN-P	100-277V~, 50/60Hz, 300W
AOK-200WFLD-NV-XX-XXYY-BN-P	100-277V~, 50/60Hz, 200W
AOK-150WFLD-NV-XX-XXYY-BN-P	100-277V~, 50/60Hz, 150W

Remark:

First "XX" Can be any letter and digit to represent different brands and size of LED

Second "XX" stands for CCT of LED, can be 27, 30, 40, 50, 57 and 65, 27=2700K, 30=3000K, 40=4000K, 50=5000K, 57=5700K, 65=6500K;


"YY" stands for CRI (color rendering index), can be 70, 80 and 90, 70=Ra: 70, 80=Ra: 80, 90=Ra: 90;

"BN" stands for beam angles Type

"P" Represents Mounting bracket

Equipment used during test:

ID Number	Instrument	Model/ Type	Cal. Date
SLCS-S-182	IK tester	AGIKCJ	2025/4/27
SLCS-S-135	Digital hygrometer thermometer	HTC-1	2025/4/30
SLCS-S-088	Tape	5M	2025/4/30
SLCS-E-027	Temperature and humidity barometer	/	2026/4/19

IEC 62262			
Clause	Requirement - Test	Result - Remark	Verdict
4	Designations		
4.1	Arrangement of the IK code 	IK08	--
4.2	Characteristic group numerals of the IK code and their meanings Each characteristic group numeral, represents an impact energy value as shown in Table1.	See table 1 of IEC 62262, IK08 Impact energy Joule 5J	--
4.3	Application of the IK code In general the degree of protection applies to the complete enclosure. If parts of the enclosure have differing degrees of protection, the latter shall be separately indicated.		N/A
4.4	Marking		
	In case where the relevant product committee decides that marking of the IK-code shall be required, the marking requirements shall be detailed in the relevant product standard.	IK08	P
	Where appropriate, such a standard should also specify the method of marking which is to be used when:		--
	—one part of an enclosure has different degree of protection to that of another part of the same enclosure;		N/A
	—the mounting position has an influence on the degree of protection.		N/A
5	General requirements for tests		
5.1	Atmospheric conditions for tests		P
	Unless otherwise specified in the relevant product standard, the test shall be carried out under the standard atmospheric conditions for tests described in IEC60068-1as:		--
	Temperature range 15°C to 35°C	25°C	P
	Air pressure 86kPa to 106kPa (860mbar to 1060mbar)	96kPa	P
	When the altitude at which the test is performed is higher than 2000m the height of fall shall be adjusted where necessary to result in the specified impact energy.	Below 2000m	N/A
5.2	Enclosures under test		N/A
	Each enclosure under test shall be in a clean and new condition, complete with all their parts in place unless otherwise specified in the relevant product standard.		P
5.3	Specifications to be given in the relevant product standard		
	The relevant product standard shall specify:		--
	—the definition of “enclosure” as it applies to the particular type of equipment;		N/A

IEC 62262			
Clause	Requirement - Test	Result - Remark	Verdict
	—the test equipment (e.g. pendulum hammer, spring hammer or vertical hammer, see Clause 7);		P
	—the number of samples to be tested;	1	P
	—the conditions for mounting, assembling and positioning the samples, e.g. by the use of an artificial surface (ceiling, floor or wall), in order to stimulate intended service conditions as far as possible;		P
	—the pre-conditioning, if any, which is to be used;		N/A
	—whether to be tested energized;	No energized	N/A
	—whether to be tested with any moving parts in motion;	No moving parts	N/A
	—the number of impacts and their points of application (see 6.3).		P
	In the absence of such specifications in the relevant product standard, conditions of this standard shall apply.		P
6	Test to verify the protection against mechanical impacts		
6.1	The tests specified in this standard are type tests.		--
6.2	In order to verify the protection against mechanical impacts blows shall be applied to the enclosure to be tested. The device to be used for this test are described in Clause 7.		P
6.3	During the test the enclosure shall be mounted, according to the manufacturer instructions for use, on a rigid support. A support is considered to be sufficiently rigid if its displacement is less than or equal to 0,1mm under the effect of an impact directly applied and whose energy corresponds to the degree of protection. Alternative mounting and support, suitable for the product, may be specified in the relevant product standard.	Displacement is less than or equal to 0,1mm	P
6.4	The number of impacts shall be five on each exposed face unless otherwise specified in the relevant product standard. The impacts shall be evenly distributed on the faces of the enclosure (s) under test. In no case shall more than three impacts be applied in the surroundings of the same	5 points, 3 times per point	P
6.5	Test evaluation The relevant product standard shall specify the criteria upon which the acceptance or rejection of the enclosure is to be based on particularly:		P
	—admissible damages;	No damage	P
	—verification criteria relative to the continuity of the safety and reliability of the equipment.	No broken	P
7	Test apparatus		
	The test shall be done by using one of the test apparatus as described in EN60068-2-75.		P

IEC 62262			
Clause	Requirement - Test	Result - Remark	Verdict
	The striking surface shall be visually examined before each impact in order to ensure that there is no damage that might affect the result of the test.	See Figure 1	P
7.1	Test Ehc: Vertical hammer		N/A
7.1.1	The hammer consists basically of a striking element which falls freely from rest through a vertical height, selected from table2 of IEC 60068-2-75, on to the specimen surface held in a horizontal plane. The characteristics of the striking element shall comply with table 1 of IEC 60068-2-75. The fall of the striking element shall be along a guide way, for example a tube, with negligible braking. This guide way shall not rest on the specimen and the striking element shall be free of the guide way on striking the specimen. In order to reduce the friction, the length l of the striking element shall not be smaller than its diameter D, and a small gap (for example 1 mm) shall be provided between the striking element and the guide way.		N/A
7.1.2	Height of fall		N/A
	The height of fall is given in table2 of IEC 60068-2-75, the equivalent mass stated therein being equal to the actual mass of the striking element.		N/A
7.2	Test Eha: Pendulum hammer		P
7.2.1	Test apparatus		P
7.2.1.1	Test apparatus for severities not exceeding 1 J		N/A
7.2.1.2	Test apparatus for severities of 2 J and above		P
7.2.2	Height of fall		P
	To produce impacts of the required severity, the striking element is released from a height depending on the equivalent mass of the pendulum, according to Table 2 of IEC 60068-2-75.		P
7.2.3	Testing		P
	In order to avoid secondary impacts, i.e. rebounds, the hammer is retained after the initial impact by grasping the striking element whilst avoiding the arm so that distortion is prevented.		P
7.3	Test Ehb: Spring hammer		N/A
7.3.1	Test apparatus		N/A
7.3.2	Influence of earth's gravity		N/A
	The downward/upward variation is taken into account when establishing the actual energy delivered.		N/A

IEC 62262			
Clause	Requirement - Test	Result - Remark	Verdict
7.3.3	Calibration		N/A
	The spring hammer is calibrated.		N/A



REMARKS:

1. The test report is valid for above tested sample only and shall not be reproduced in part without written approval of the laboratory.

2. Characterization & Condition of Sample: Normal.

Table 1 of IEC 62262-2002:

Table 1- Relation between IK code and impact energy

IKcode	IK00	IK01	IK02	IK03	IK04	IK05	IK06	IK07	IK08	IK09	IK10
Impact energy Joule	a	0,14	0,2	0,35	0,5	0,7	1	2	5	10	20
Not protected according to this standard											

NOTE 1 When higher impact energy is required the value of 50 Joule is recommended.

NOTE 2 A characteristic group numeral of two figures has been chosen to avoid confusion with some former national standards which used a single numeral for a specific impact energy.

Table 2 of IEC 60068-2-75:

Table 2- Height of fall

Energy J	0,14	0,2		(0,3)	0,35	(0,4)	0,5		0,7	1	2	5	10	20	50
Equivalent mass kg	0,25	(0,2)	0,25	(0,2)	0,25	(0,2)	(0,2)	0,25	0,25	0,25	0,5	1,7	5	5	10
Height of tall mm±1%	56	(100)	80	(150)	140	(200)	(250)	200	280	400	400	300	200	400	500

NOTES

1 See note in 3.2.2.

2 In this part of IEC 60068, the energy, J, is calculated taking the standard acceleration due to the earth's Gravity(g_n), rounded up to the nearest whole number, that is 10m/s².

Table 1 of IEC 60068-2-75

Table 1 - Co-ordinated characteristics of the striking elements

Energy value J	≤1 ±10%	2 ±5%	5 ±5%	10 ±5%	20 ±5%	50 ±5%
Equivalent mass ±2% kg	0,25 (0,2)	0,5	1,7	5	5	10
Material	Polyamide ¹⁾ Steel ²⁾					
R mm	10	25	25	50	50	50
D mm	18,5 (20)	35	60	80	100	125
f mm	6,2 (10)	7	10	20	20	25
r mm	--	--	6	--	10	17
l mm	To be adjusted to match the equivalent mass, see annex A.					

1) $85 \leq HRR \leq 100$, Rockwell hardness according to ISO 2039-2.

2) Fe 490-2, according to ISO 1052: Rockwell hardness: HRE 80...85 according to ISO 6508.

NOTE - The values shown in brackets for the equivalent mass and the diameter of the striking element for the energy value equal to or less than 1 J are those in the current test Ef. The values currently in test Eg are also shown for these two parameters. For co-ordination purposes, the values in brackets will be deleted five years from the publication of this standard.

Figure1— Example sketch of a striking element

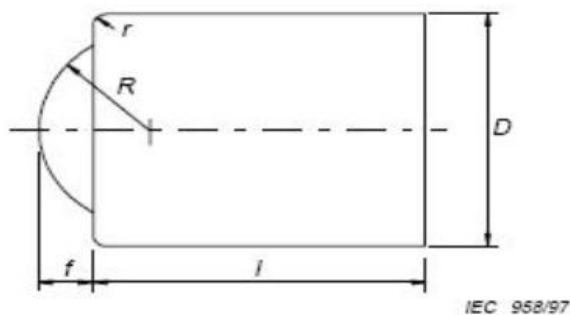


Figure 1 – Example sketch of a striking element

Photo Documentation:

Photo 1: Overall view of model AOK-600WFLD-NV-L2-6570-30D-T



Photo 2: Overall view of model AOK-600WFLD-NV-L2-6570-30D-T



Photo Documentation:

Photo 3: IK08 test of model AOK-600WFLD-NV-L2-6570-30D-T



Photo 4: IK08 test of model AOK-600WFLD-NV-L2-6570-30D-T



----- End of Test Report-----