


室内灯具光度数据

实测参数: U:219.1V I:0.6891A P:148.7W PF:0.9848 Freq:50.01Hz 实检光通:26477x1 lm		
灯具名称: AOK HBE	灯具类型:	灯具重量:
灯具规格: AOK-150WHBE-NV-L2-00-4080-60D-P	外型尺寸:	测试编号:
制造厂商: AOK	发光口面: $\Phi 263\text{mm}$	遮光角:

光源数据		光度数据				光效: 178.06 lm/W
型号	2835	峰值光强 (cd)	20149	S/MH (C0/180)	1.01	
标称功率 (W)	150	灯具效率 (%)	100.0	S/MH (C90/270)	0.98	
额定电源电压 (V)	220	总光通量 (lm)	26477	η UP, DN (C0-180)	0.0, 50.4	
额定光通量 (lm)	26477	CIE分类	直接	η UP, DN (C180-360)	0.0, 49.6	
灯具内光源数 (只)	1	上射光通比 (%)	0.0	CIBSE SHR NOM	1.00	
实测电源电压 (V)	220	下射光通比 (%)	100.0	CIBSE SHR MAX	1.00	

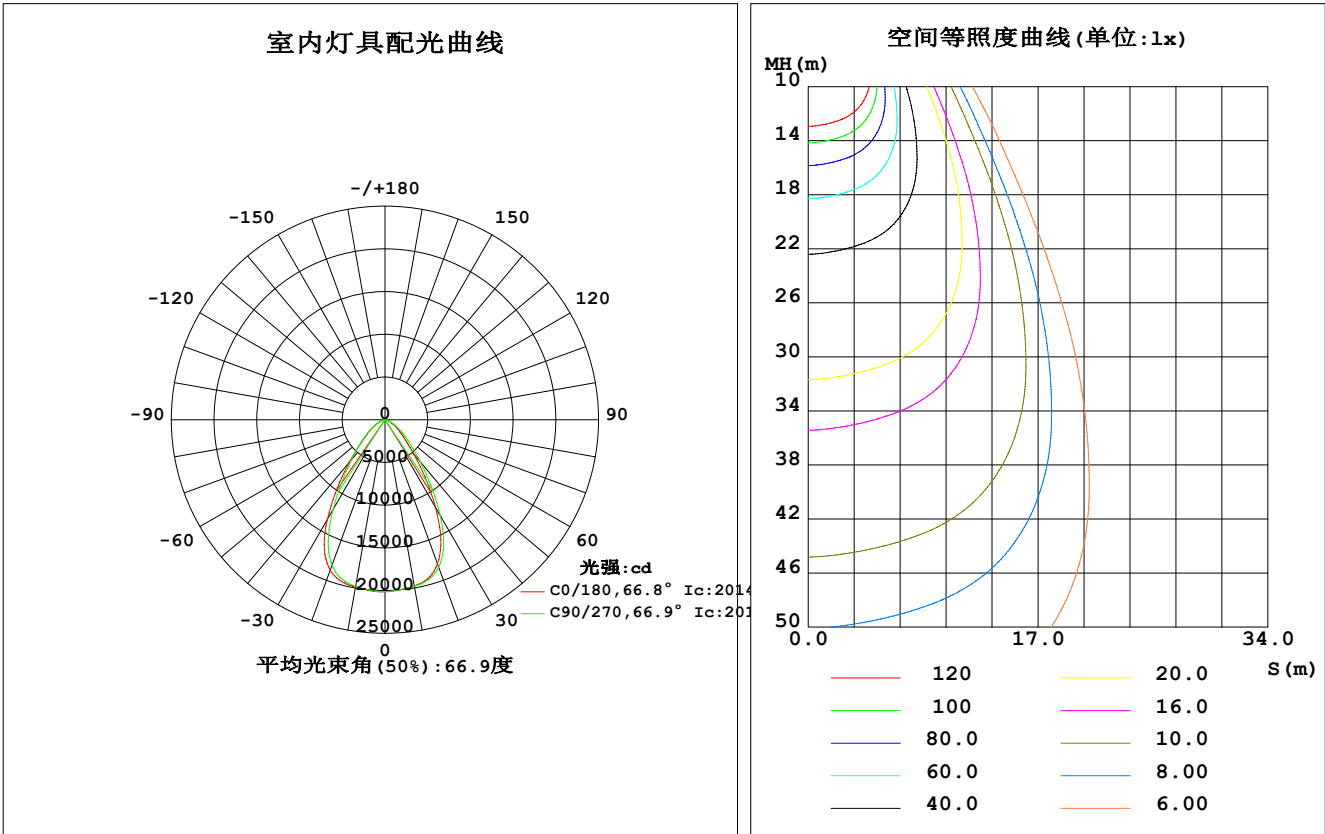

C角度范围: 0度 - 360度
C角度间隔: 15.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: yanyonggeng
测试日期: 2024-8-20

Y角度范围: 0度 - 180度
Y角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.0.363T
环境湿度: 65.0%
测试距离: 7.682米 [K=1.0000]
备注:

灯具环带光通量

环带光通量：

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ(°)	Φ环	Φ总	%lum, lamp
10	1975	1975	1979	1984	1990	1985	1979	1978	0- 10	1904	1904	7.19, 7.19
20	1795	1824	1838	1865	1874	1847	1810	1782	10- 20	5446	7350	27.8, 27.8
30	1183	1248	1292	1341	1349	1254	1220	1156	20- 30	7245	14596	55.1, 55.1
40	524.7	569.2	642.4	645.0	650.0	585.6	612.7	555.1	30- 40	5588	20183	76.2, 76.2
50	242.4	278.7	309.7	311.3	292.1	294.1	304.8	275.4	40- 50	3187	23370	88.3, 88.3
60	118.0	137.7	149.8	156.8	141.8	148.8	149.6	134.9	50- 60	1834	25204	95.2, 95.2
70	46.74	51.02	57.52	60.82	58.89	58.69	57.89	50.22	60- 70	914.5	26118	98.6, 98.6
80	10.65	11.35	13.53	15.13	16.25	14.57	14.87	11.34	70- 80	316.0	26434	99.8, 99.8
90	0	0	0	0	0	0	0	0	80- 90	42.74	26477	100, 100
100	0	0	0	0	0	0	0	0	90-100	0	26477	100, 100
110	0	0	0	0	0	0	0	0	100-110	0	26477	100, 100
120	0	0	0	0	0	0	0	0	110-120	0	26477	100, 100
130	0	0	0	0	0	0	0	0	120-130	0	26477	100, 100
140	0	0	0	0	0	0	0	0	130-140	0	26477	100, 100
150	0	0	0	0	0	0	0	0	140-150	0	26477	100, 100
160	0	0	0	0	0	0	0	0	150-160	0	26477	100, 100
170	0	0	0	0	0	0	0	0	160-170	0	26477	100, 100
180	0	0	0	0	0	0	0	0	170-180	0	26477	100, 100
单位:°	光强:×10cd									单位:lm		

锥面光通量(90度)：22002 lm

%lum = 83.1%

%lamp = 83.1%

锥面光通量(120度)：25204 lm

%lum = 95.2%


%lamp = 95.2%

C角度范围： 0度 - 360度
C角度间隔：15.0度
测试速度：快速
环境温度:25.3℃
测试人员:yanyonggeng
测试日期:2024-8-20

γ角度范围： 0度 - 180度
γ角度间隔： 1.0度
测试系统：远方 (EVERFINE) GO-2000A_V1系统 V2.0.363T
环境湿度:65.0%
测试距离:7.682米 [K=1.0000]
备注：

灯具亮度限制曲线

实测参数: U:219.1V I:0.6891A P:148.7W PF:0.9848 Freq:50.01Hz 实检光通:26477x1 lm		
灯具名称: AOK HBE	灯具类型:	灯具重量:
灯具规格: AOK-150WHBE-NV-L2-00-4080-60D-P	外型尺寸:	测试编号:
制造厂商: AOK	发光口面: $\Phi 263\text{mm}$	遮光角:

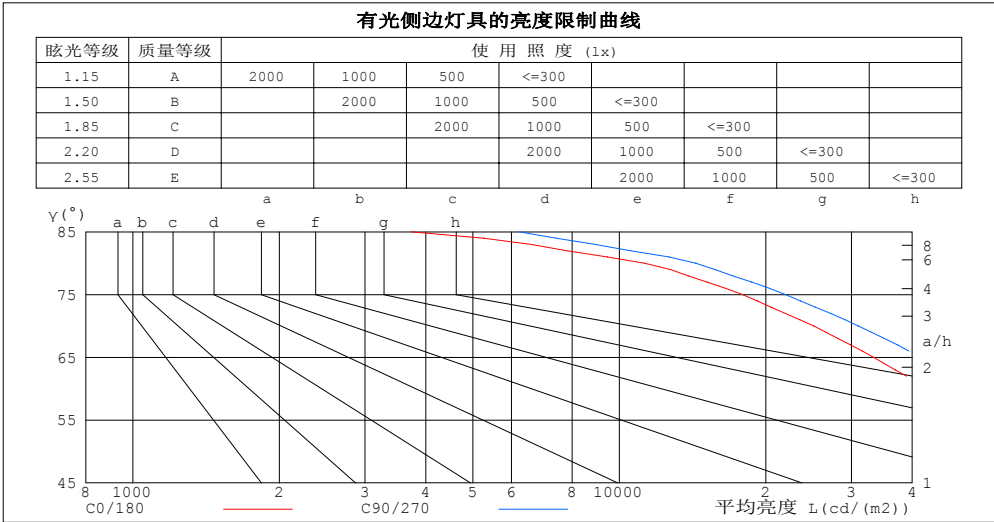

平均亮度值 cd/(m2)		
$\gamma(^{\circ})$	C0/180	C90/270
85	3740	6223
80	11265	14351
75	17915	21935
70	25097	30977
65	33300	41697
60	43333	55175
55	55143	70477
50	69267	88754
45	89971	115157


C角度范围: 0度 - 360度
C角度间隔: 15.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: yanyonggeng
测试日期: 2024-8-20

γ 角度范围: 0度 - 180度
 γ 角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.0.363T
环境湿度: 65.0%
测试距离: 7.682米 [K=1.0000]
备注:

工作面利用系数和灯具概算曲线

实测参数: U:219.1V I:0.6891A P:148.7W PF:0.9848 Freq:50.01Hz 实检光通:26477x1 lm		
灯具名称: AOK HBE	灯具类型:	灯具重量:
灯具规格: AOK-150WHBE-NV-L2-00-4080-60D-P	外型尺寸:	测试编号:
制造厂商: AOK	发光口面: $\Phi 263\text{mm}$	遮光角:

顶棚	80%			70%			50%			30%			10%			0
墙面	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
地板	20%			20%			20%			20%			20%			0
室空间比	工 作 面 利 用 系 数															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.09	1.06	1.03	1.07	1.04	1.02	1.03	1.01	.99	.99	.97	.96	.95	.94	.93	.91
2.0	.99	.95	.91	.98	.93	.90	.94	.91	.88	.91	.88	.86	.88	.86	.84	.82
3.0	.91	.85	.80	.90	.84	.80	.87	.82	.78	.84	.80	.77	.82	.79	.76	.74
4.0	.84	.77	.72	.82	.76	.72	.80	.75	.71	.78	.73	.70	.76	.72	.69	.67
5.0	.77	.70	.65	.76	.70	.65	.74	.69	.64	.72	.67	.64	.71	.66	.63	.61
6.0	.71	.64	.59	.70	.64	.59	.69	.63	.59	.67	.62	.58	.66	.61	.58	.56
7.0	.66	.59	.54	.65	.59	.54	.64	.58	.54	.63	.58	.54	.62	.57	.53	.52
8.0	.62	.55	.50	.61	.55	.50	.60	.54	.50	.59	.53	.49	.58	.53	.49	.48
9.0	.58	.51	.46	.57	.51	.46	.56	.50	.46	.55	.50	.46	.54	.49	.46	.44
10.0	.54	.47	.43	.54	.47	.43	.53	.47	.43	.52	.47	.43	.51	.46	.43	.41

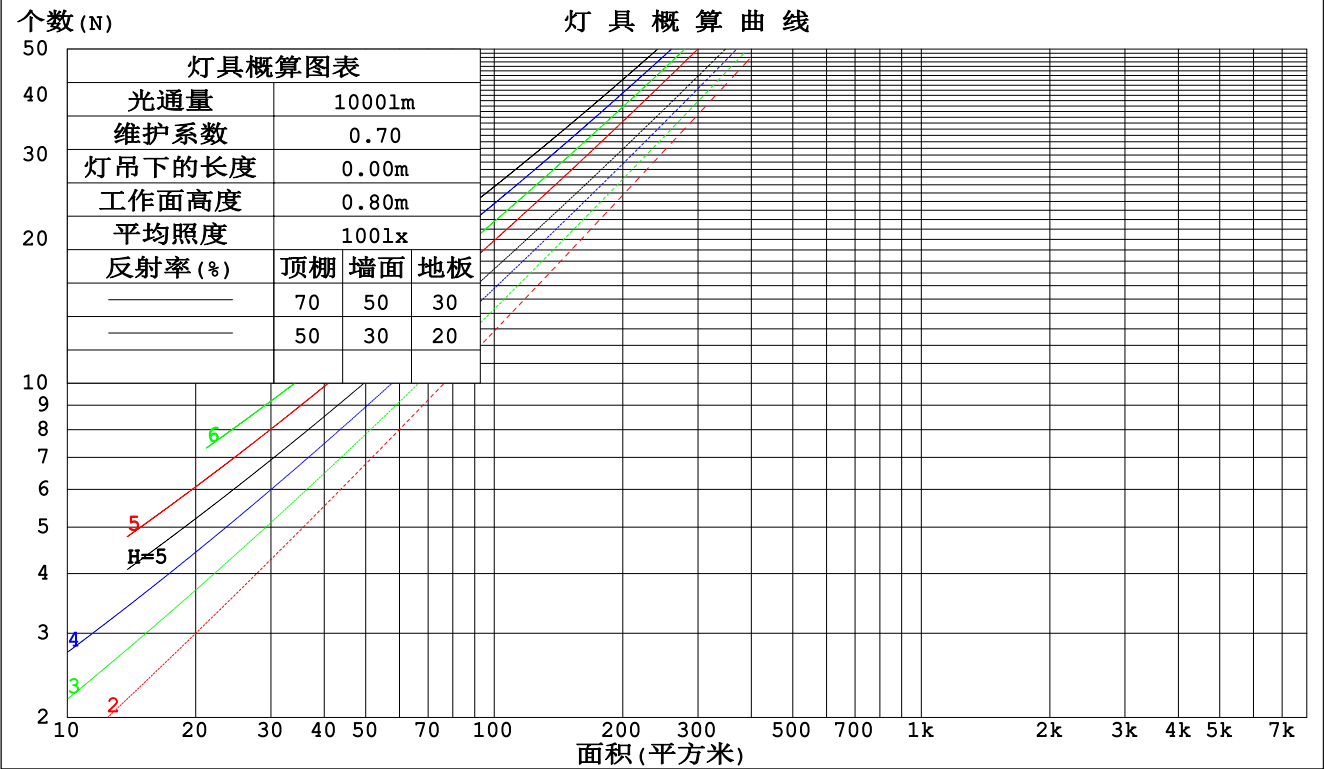

C角度范围: 0度 - 360度
C角度间隔: 15.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: yanyonggeng
测试日期: 2024-8-20

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.0.363T
环境湿度: 65.0%
测试距离: 7.682米 [K=1.0000]
备注:

墙面和天花板利用系数

实测参数: U:219.1V I:0.6891A P:148.7W PF:0.9848 Freq:50.01Hz 实检光通:26477x1 lm					
灯具名称: AOK HBE			灯具类型:		灯具重量:
灯具规格: AOK-150WHBE-NV-L2-00-4080-60D-P			外型尺寸:		测试编号:
制造厂商: AOK			发光口面: Φ263mm		遮光角:

顶棚	80%			70%			50%			30%			10%			0
墙面	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
地板	20%			20%			20%			20%			20%			0
室空间比	墙 壁 面 利 用 系 数															
0.0																
1.0	.212	.121	.038	.205	.117	.037	.193	.110	.035	.181	.104	.033	.170	.099	.032	
2.0	.205	.112	.035	.199	.110	.034	.188	.105	.033	.178	.100	.031	.169	.096	.030	
3.0	.195	.104	.031	.190	.102	.031	.181	.098	.030	.172	.094	.029	.164	.091	.028	
4.0	.185	.096	.028	.181	.095	.028	.172	.091	.027	.165	.088	.027	.158	.086	.026	
5.0	.175	.089	.026	.171	.088	.026	.164	.085	.025	.157	.083	.025	.151	.081	.024	
6.0	.166	.083	.024	.162	.082	.024	.156	.080	.023	.150	.078	.023	.144	.076	.023	
7.0	.157	.078	.022	.154	.077	.022	.149	.075	.022	.143	.073	.021	.138	.072	.021	
8.0	.149	.073	.021	.147	.072	.020	.142	.071	.020	.137	.069	.020	.132	.068	.020	
9.0	.142	.069	.019	.140	.068	.019	.135	.067	.019	.131	.066	.019	.127	.064	.019	
10.0	.135	.065	.018	.133	.064	.018	.129	.063	.018	.125	.062	.018	.121	.061	.018	

顶棚	80%			70%			50%			30%			10%			0
墙面	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
地板	20%			20%			20%			20%			20%			0
室空间比	天 花 板 利 用 系 数															
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.174	.157	.142	.148	.135	.122	.102	.093	.085	.058	.054	.049	.019	.017	.016	
2.0	.161	.132	.108	.138	.114	.094	.094	.079	.065	.054	.046	.038	.017	.015	.012	
3.0	.150	.114	.085	.129	.098	.074	.088	.068	.052	.051	.040	.030	.016	.013	.010	
4.0	.141	.100	.068	.121	.086	.059	.083	.060	.042	.048	.035	.025	.015	.011	.008	
5.0	.133	.088	.055	.114	.076	.048	.079	.053	.034	.046	.031	.020	.015	.010	.007	
6.0	.126	.079	.046	.108	.069	.040	.075	.048	.028	.043	.028	.017	.014	.009	.006	
7.0	.120	.072	.039	.103	.063	.034	.071	.044	.024	.041	.026	.014	.013	.008	.005	
8.0	.114	.066	.033	.098	.057	.029	.068	.040	.021	.039	.024	.012	.013	.008	.004	
9.0	.109	.061	.029	.094	.053	.025	.065	.037	.018	.038	.022	.011	.012	.007	.004	
10.0	.104	.057	.025	.090	.049	.022	.062	.035	.016	.036	.021	.009	.012	.007	.003	

C角度范围: 0度 - 360度
C角度间隔: 15.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: yanyonggeng
测试日期: 2024-8-20

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.0.363T
环境湿度: 65.0%
测试距离: 7.682米 [K=1.0000]
备注:

UGR(Unified Glare Rating)数据表

实测参数: U:219.1V I:0.6891A P:148.7W PF:0.9848 Freq:50.01Hz 实检光通:26477x1 lm										
灯具名称: AOK HBE					灯具类型:			灯具重量:		
灯具规格: AOK-150WHBE-NV-L2-00-4080-60D-P					外型尺寸:			测试编号:		
制造厂商: AOK					发光口面: Φ263mm			遮光角:		
反射比: 天花板	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
墙面	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
工作面	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
房间尺寸	交叉(Viewed crosswise)					向前(Viewed endwise)				
x = 2H y = 2H	25.1	26.2	25.3	26.4	26.6	25.6	26.8	25.9	27.0	27.1
3H	25.3	26.4	25.6	26.6	26.8	25.9	27.0	26.2	27.2	27.4
4H	25.3	26.3	25.6	26.6	26.8	26.0	27.0	26.3	27.2	27.4
6H	25.3	26.2	25.6	26.5	26.7	25.9	26.9	26.3	27.1	27.4
8H	25.3	26.2	25.6	26.4	26.7	25.9	26.8	26.2	27.1	27.3
12H	25.2	26.1	25.5	26.3	26.6	25.9	26.7	26.2	27.0	27.3
4H 2H	25.2	26.2	25.5	26.4	26.6	25.7	26.7	26.0	26.9	27.2
3H	25.5	26.4	25.8	26.6	26.9	26.1	26.9	26.4	27.2	27.5
4H	25.6	26.4	25.9	26.7	27.0	26.1	26.9	26.5	27.2	27.5
6H	25.6	26.3	26.0	26.6	26.9	26.1	26.8	26.5	27.1	27.5
8H	25.5	26.2	25.9	26.5	26.9	26.1	26.7	26.5	27.1	27.5
12H	25.5	26.1	25.9	26.4	26.8	26.1	26.6	26.5	27.0	27.4
8H 4H	25.5	26.2	25.9	26.5	26.9	26.1	26.7	26.5	27.0	27.4
6H	25.5	26.0	26.0	26.4	26.9	26.1	26.6	26.5	27.0	27.4
8H	25.5	26.0	26.0	26.4	26.8	26.1	26.5	26.5	26.9	27.4
12H	25.5	25.8	25.9	26.3	26.8	26.0	26.4	26.5	26.8	27.3
12H 4H	25.5	26.1	25.9	26.4	26.8	26.0	26.6	26.4	27.0	27.4
6H	25.5	25.9	25.9	26.4	26.8	26.0	26.5	26.5	26.9	27.4
8H	25.5	25.9	25.9	26.3	26.8	26.0	26.4	26.5	26.8	27.3
不同间隔布灯时,观察者位置引起的UGR变化:										
S = 1.0H	+ 1.1 / - 1.7					+ 1.2 / - 1.5				
1.5H	+ 1.5 / - 1.2					+ 2.0 / - 1.6				
2.0H	+ 1.7 / - 1.7					+ 2.5 / - 2.4				

依据CIE Pub.117计算, 26477lm光源光通,表格已经进行修正(8log(F/F0) = 11.4)。

C角度范围: 0度 - 360度
C角度间隔: 15.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: yanyonggeng
测试日期: 2024-8-20

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方(EVERFINE)GO-2000A_V1系统 V2.0.363T
环境湿度: 65.0%
测试距离: 7.682米 [K=1.0000]
备注:

UF利用系数表

实测参数: U:219.1V I:0.6891A P:148.7W PF:0.9848 Freq:50.01Hz 实检光通:26477x1 lm		
灯具名称: AOK HBE	灯具类型:	灯具重量:
灯具规格: AOK-150WHBE-NV-L2-00-4080-60D-P	外型尺寸:	测试编号:
制造厂商: AOK	发光口面: $\Phi 263\text{mm}$	遮光角:


反 射 比 / REFLECTANCE										
天花板	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
墙壁	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
工作面	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
室形指数	利用系数 UTILIZATION FACTORS(%) $k(RI) \times RCR = 5$									
$k = 0.60$	77	68	63	76	68	63	75	68	63	58
0.80	85	77	72	85	77	72	83	76	72	67
1.00	92	84	79	91	84	79	89	84	79	74
1.25	97	90	85	96	89	85	94	88	84	79
1.50	100	94	90	99	93	89	97	92	88	83
2.00	105	99	95	103	98	94	100	96	93	87
2.50	107	102	98	105	101	97	102	98	95	89
3.00	109	105	101	107	103	100	104	101	98	91
4.00	112	108	105	109	106	104	106	103	101	93
5.00	113	110	108	111	108	106	107	105	103	95
ROOM INDEX	UF (总)									UF (直接)
依据标准文件 DIN EN 13032-2 2004			悬挂灯				安装距高比 SHRNOM = 1.25			

C角度范围: 0度 - 360度
C角度间隔: 15.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: yanyonggeng
测试日期: 2024-8-20

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.0.363T
环境湿度: 65.0%
测试距离: 7.682米 [K=1.0000]
备注:

灯具等光强曲线

实测参数: U:219.1V I:0.6891A P:148.7W PF:0.9848 Freq:50.01Hz 实检光通:26477x1 lm		
灯具名称: AOK HBE	灯具类型:	灯具重量:
灯具规格: AOK-150WHBE-NV-L2-00-4080-60D-P	外型尺寸:	测试编号:
制造厂商: AOK	发光口面: $\Phi 263\text{mm}$	遮光角:

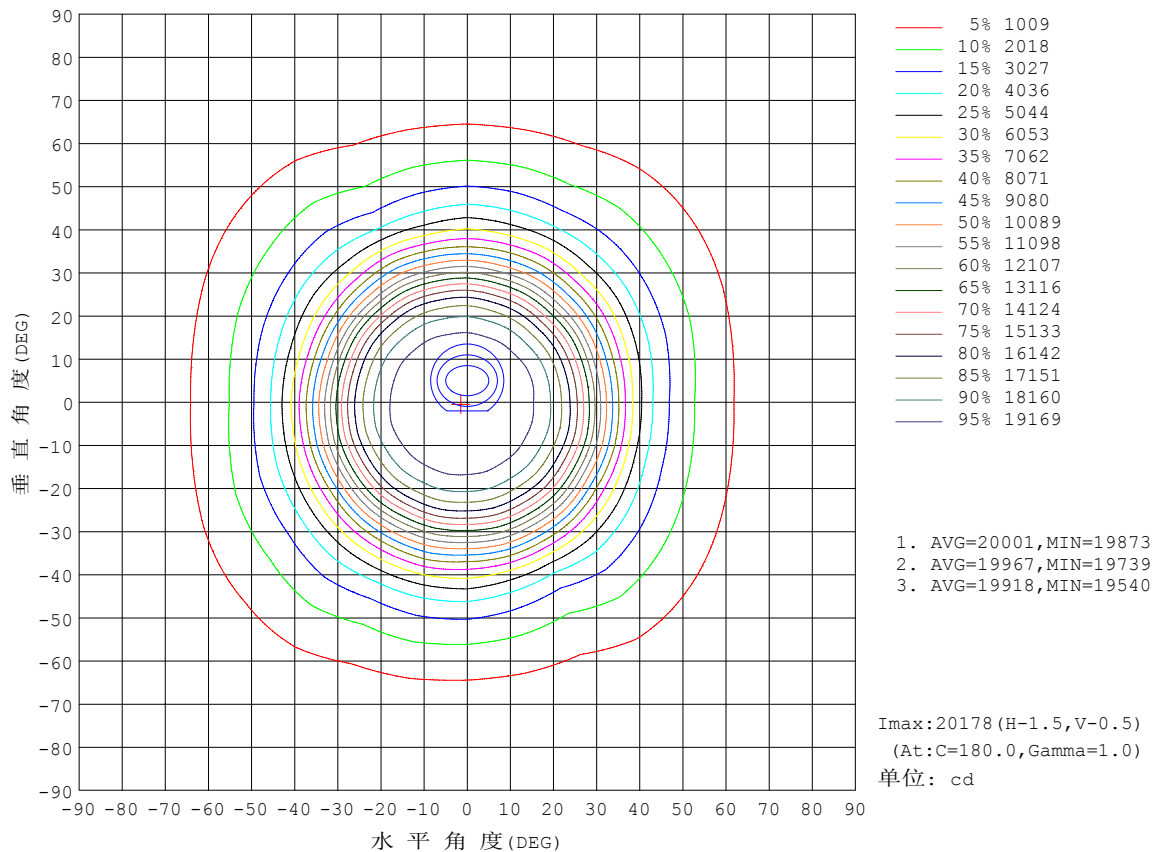


C角度范围: 0度 - 360度
C角度间隔: 15.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: yanyonggeng
测试日期: 2024-8-20

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.0.363T
环境湿度: 65.0%
测试距离: 7.682米 [K=1.0000]
备注:

灯 具 有 效 平 均 照 度 图

实测参数: U:219.1V I:0.6891A P:148.7W PF:0.9848 Freq:50.01Hz 实检光通:26477x1 lm		
灯具名称: AOK HBE	灯具类型:	灯具重量:
灯具规格: AOK-150WHBE-NV-L2-00-4080-60D-P	外型尺寸:	测试编号:
制造厂商: AOK	发光口面: $\Phi 263\text{mm}$	遮光角:

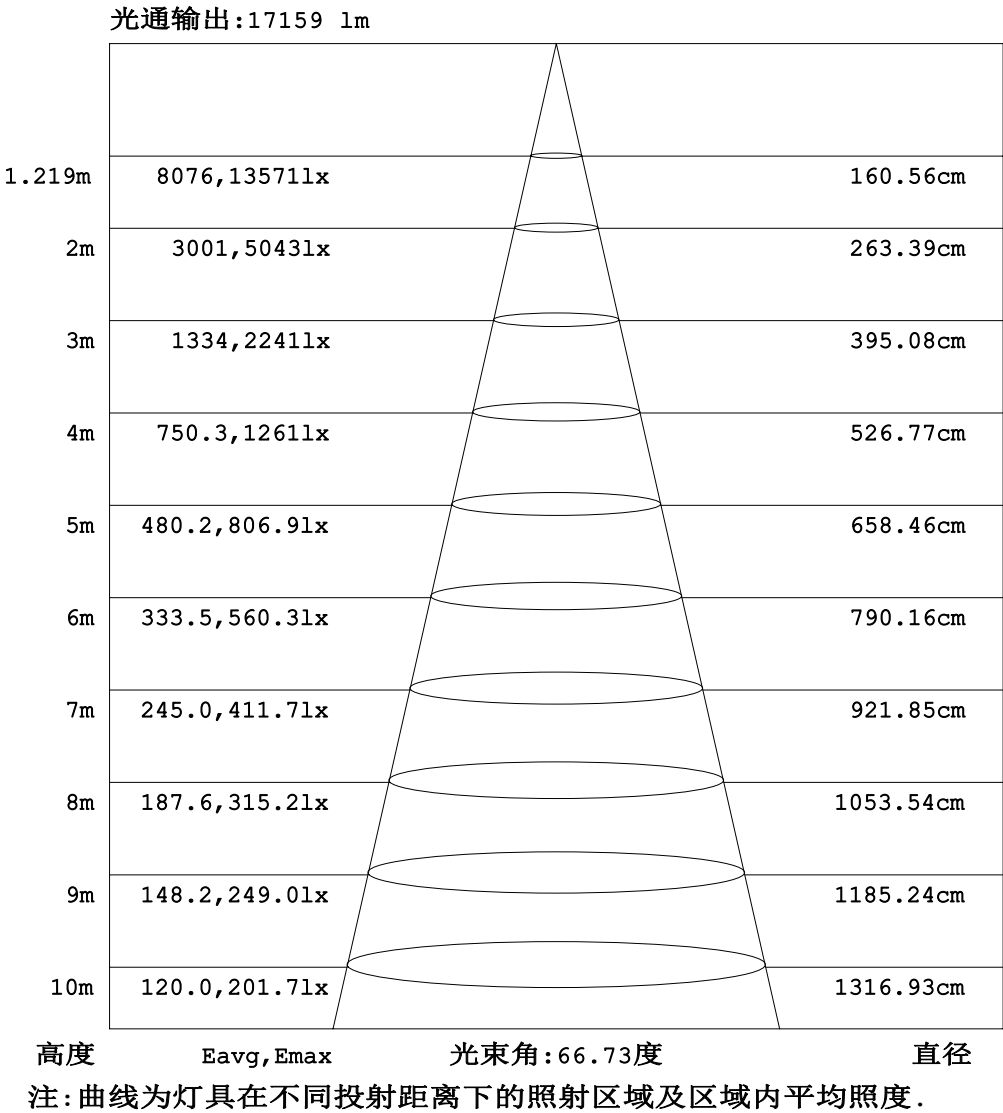


C角度范围: 0度 - 360度
C角度间隔: 15.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: yanyonggeng
测试日期: 2024-8-20

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.0.363T
环境湿度: 65.0%
测试距离: 7.682米 [K=1.0000]
备注:

平面等照度曲线

实测参数: U:219.1V I:0.6891A P:148.7W PF:0.9848 Freq:50.01Hz 实检光通:26477x1 lm		
灯具名称: AOK HBE	灯具类型:	灯具重量:
灯具规格: AOK-150WHBE-NV-L2-00-4080-60D-P	外型尺寸:	测试编号:
制造厂商: AOK	发光口面: $\Phi 263\text{mm}$	遮光角:

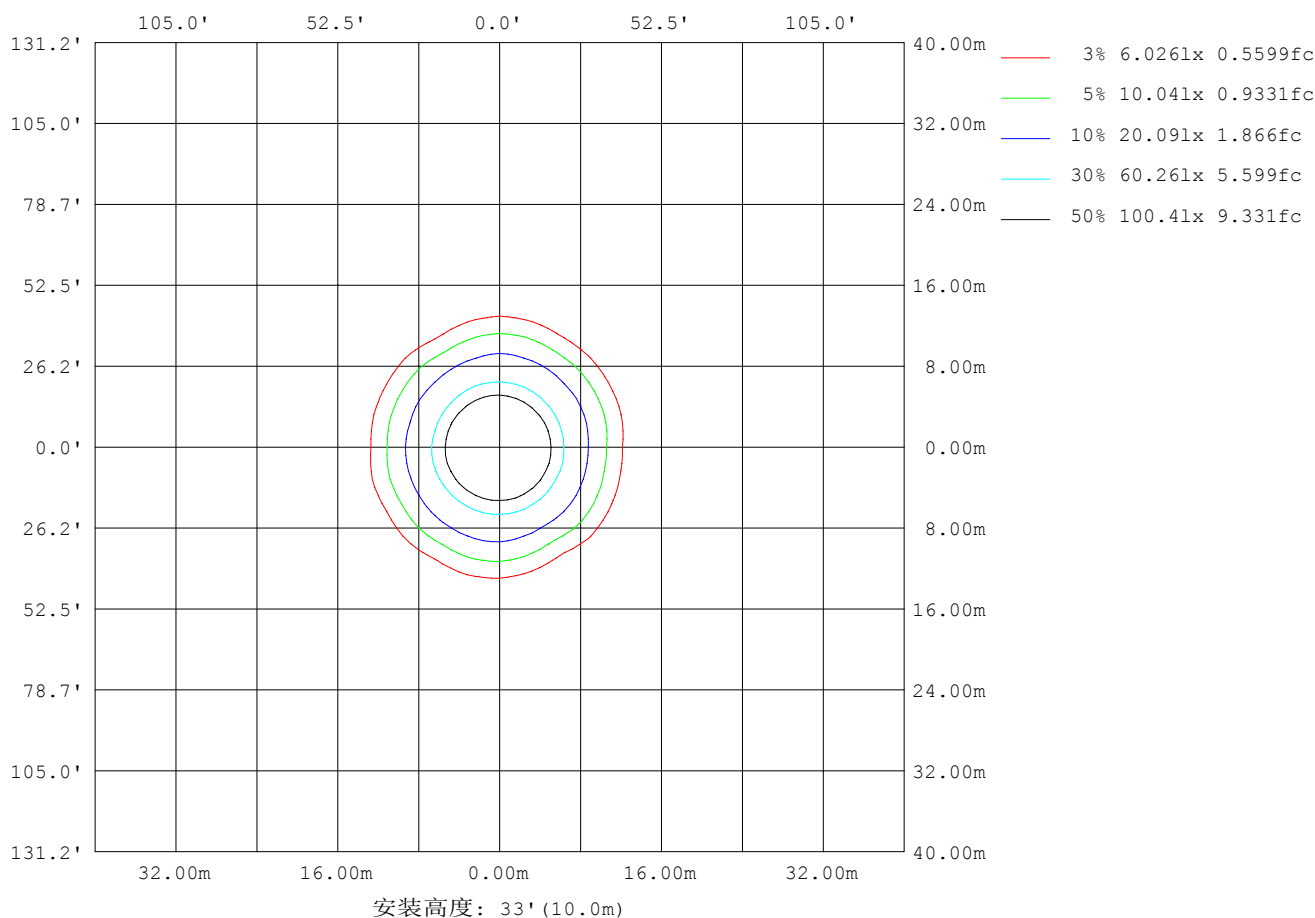

C角度范围: 0度 - 360度
C角度间隔: 15.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: yanyonggeng
测试日期: 2024-8-20

Y角度范围: 0度 - 180度
Y角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.0.363T
环境湿度: 65.0%
测试距离: 7.682米 [K=1.0000]
备注:

LED筒灯平均亮度报告

实测参数: U:219.1V I:0.6891A P:148.7W PF:0.9848 Freq:50.01Hz 实检光通:26477x1 lm		
灯具名称: AOK HBE	灯具类型:	灯具重量:
灯具规格: AOK-150WHBE-NV-L2-00-4080-60D-P	外型尺寸:	测试编号:
制造厂商: AOK	发光口面: $\Phi 263\text{mm}$	遮光角:


平均亮度	数值 (cd/m ²)
L横 (65) av	37096
L横 (75) av	21013
L横 (85) av	6591
L纵 (65) av	41809
L纵 (75) av	22177
L纵 (85) av	6708
L45 (65) av	40734
L45 (75) av	19512
L45 (85) av	6541

注:依据标准 GB/T 29293-2012 计算

C角度范围: 0度 - 360度
C角度间隔: 15.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: yanyonggeng
测试日期: 2024-8-20

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.0.363T
环境湿度: 65.0%
测试距离: 7.682米 [K=1.0000]
备注:

平面照度曲线

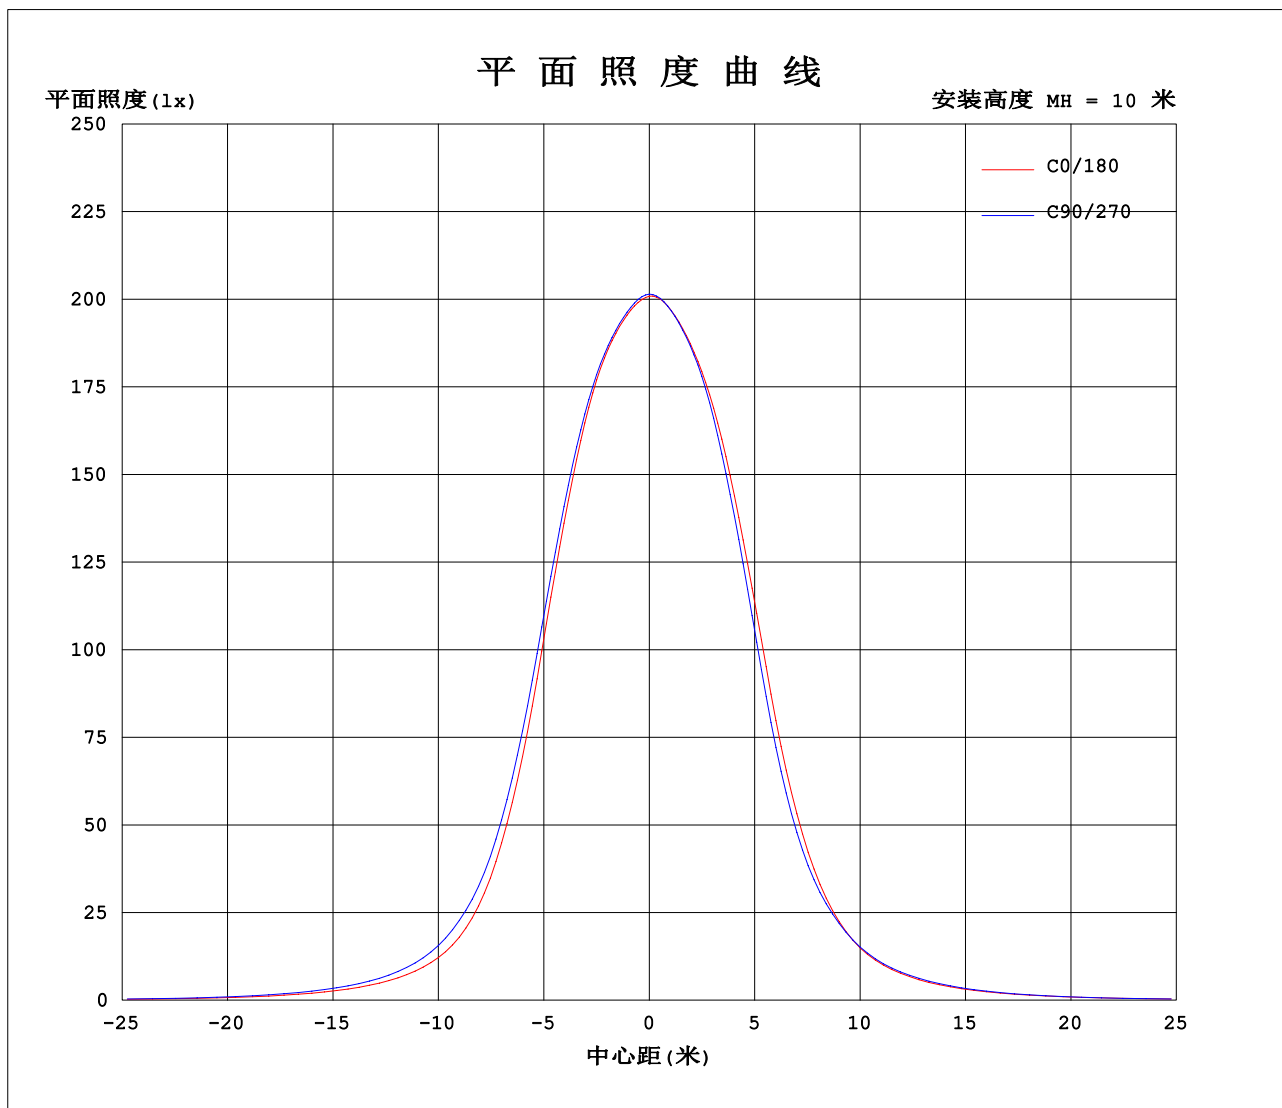

C角度范围: 0度 - 360度
C角度间隔: 15.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: yanyonggeng
测试日期: 2024-8-20

Y角度范围: 0度 - 180度
Y角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.0.363T
环境湿度: 65.0%
测试距离: 7.682米 [K=1.0000]
备注:

光 强 分 布 数 据 表 格

实测参数: U:219.1V I:0.6891A P:148.7W PF:0.9848 Freq:50.01Hz 实检光通:26477x1 lm																			
灯具名称: AOK HBE										灯具类型:					灯具重量:				
灯具规格: AOK-150WHBE-NV-L2-00-4080-60D-P										外型尺寸:					测试编号:				
制造厂商: AOK										发光口面: Φ 263mm					遮光角:				

表--1										单位: $\times 10\text{cd}$									
γ (DEG) \ C (DEG)	0	15	30	45	60	75	90	105	120	135	150	165	180	195	210	225	240	255	270
0	2014	2014	2014	2014	2014	2014	2014	2014	2014	2014	2014	2014	2014	2014	2014	2014	2014	2014	2014
5	1996	1996	1996	1997	1997	1998	1999	2001	2002	2004	2006	2008	2008	2007	2007	2005	2005	2003	2002
10	1975	1975	1974	1975	1976	1978	1979	1981	1982	1984	1986	1990	1990	1989	1989	1985	1983	1979	1979
15	1928	1932	1931	1935	1936	1941	1943	1948	1950	1955	1956	1960	1960	1958	1958	1951	1946	1937	1935
20	1795	1810	1813	1824	1824	1836	1838	1849	1852	1865	1865	1874	1874	1866	1864	1847	1838	1817	1810
25	1549	1577	1581	1603	1605	1624	1624	1642	1647	1669	1671	1684	1678	1658	1652	1622	1614	1584	1574
30	1183	1211	1214	1248	1259	1290	1292	1313	1314	1341	1344	1360	1349	1306	1291	1254	1253	1225	1220
35	818	842	836	872	892	929	936	964	957	963	960	981	970	919	893	876	892	876	871
40	525	529	555	569	572	609	642	659	650	645	640	648	650	613	604	586	596	591	613
45	346	351	375	388	360	401	442	443	429	438	428	433	424	420	419	407	384	407	430
50	242	250	267	279	247	282	310	312	295	311	298	308	292	297	294	294	266	290	305
55	172	181	191	200	175	202	219	223	207	225	213	223	204	214	210	214	188	208	218
60	118	125	130	138	120	139	150	154	143	157	148	155	142	149	147	149	130	143	150
65	76.6	80.7	83.8	88.5	77.5	88.8	95.7	98.7	92.6	102	96.9	101	93.7	97.7	96.7	97.0	85.5	92.0	96.3
70	46.7	48.4	49.4	51.0	46.3	53.1	57.5	59.3	55.8	60.8	58.9	61.5	58.9	60.1	59.3	58.7	53.1	55.7	57.9
75	25.2	25.7	23.3	25.2	21.7	28.5	30.8	31.8	27.1	31.1	28.9	33.9	33.8	33.5	30.6	29.3	29.0	30.7	31.5
80	10.7	9.85	9.28	11.4	9.37	11.0	13.5	13.0	12.1	15.1	13.4	14.8	16.2	14.7	12.7	14.6	12.7	13.6	14.9
85	1.77	1.53	1.85	2.18	2.04	1.84	2.94	2.51	3.17	4.01	3.66	3.52	4.47	3.23	3.72	4.00	3.58	2.68	3.41
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
95	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
105	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
115	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
125	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
135	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
145	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
155	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
165	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
175	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

C角度范围: 0度 - 360度
C角度间隔: 15.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: yanyonggeng
测试日期: 2024-8-20

γ 角度范围: 0度 - 180度
 γ 角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.0.363T
环境湿度: 65.0%
测试距离: 7.682米 [K=1.0000]
备注:

光 强 分 布 数 据 表 格

实测参数: U:219.1V I:0.6891A P:148.7W PF:0.9848 Freq:50.01Hz 实检光通:26477x1 lm		
灯具名称: AOK HBE	灯具类型:	灯具重量:
灯具规格: AOK-150WHBE-NV-L2-00-4080-60D-P	外型尺寸:	测试编号:
制造厂商: AOK	发光口面: ϕ 263mm	遮光角:

表--2						单位: $\times 10\text{cd}$													
γ (DEG) \ C (DEG)	285	300	315	330	345														
0	2014	2014	2014	2014	2014														
5	2000	2000	2000	1999	1998														
10	1977	1978	1978	1979	1978														
15	1929	1929	1926	1929	1928														
20	1793	1792	1782	1791	1791														
25	1546	1541	1521	1532	1534														
30	1187	1182	1156	1168	1162														
35	857	847	820	821	810														
40	591	581	555	560	542														
45	412	392	385	381	372														
50	294	273	275	270	265														
55	210	192	198	191	189														
60	143	130	135	130	129														
65	91.2	83.8	86.3	83.6	82.2														
70	54.0	50.0	50.2	49.4	48.8														
75	28.8	25.3	24.1	24.3	25.7														
80	11.8	10.7	11.3	9.84	9.57														
85	2.04	2.50	2.20	2.04	1.38														
90	0.00	0.00	0.00	0.00	0.00														
95	0.00	0.00	0.00	0.00	0.00														
100	0.00	0.00	0.00	0.00	0.00														
105	0.00	0.00	0.00	0.00	0.00														
110	0.00	0.00	0.00	0.00	0.00														
115	0.00	0.00	0.00	0.00	0.00														
120	0.00	0.00	0.00	0.00	0.00														
125	0.00	0.00	0.00	0.00	0.00														
130	0.00	0.00	0.00	0.00	0.00														
135	0.00	0.00	0.00	0.00	0.00														
140	0.00	0.00	0.00	0.00	0.00														
145	0.00	0.00	0.00	0.00	0.00														
150	0.00	0.00	0.00	0.00	0.00														
155	0.00	0.00	0.00	0.00	0.00														
160	0.00	0.00	0.00	0.00	0.00														
165	0.00	0.00	0.00	0.00	0.00														
170	0.00	0.00	0.00	0.00	0.00														
175	0.00	0.00	0.00	0.00	0.00														
180	0.00	0.00	0.00	0.00	0.00														

C角度范围: 0度 - 360度
C角度间隔: 15.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: yanyonggeng
测试日期: 2024-8-20

γ 角度范围: 0度 - 180度
 γ 角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.0.363T
环境湿度: 65.0%
测试距离: 7.682米 [K=1.0000]
备注: