

TEST REPORT

LED Street Light

Test Model: AOK-50WiLH-NV-A5-00-4080-T2-A

Report Number : LCSB02256027S

Applicant : AOK Industrial Company Limited
1/F of 1#Building, East Block of 3/F of Building 1, And 2/F of Building 4, ST George's Science and Technology Industrial

Address : Park, Northside of Xinyu Road, Xiangshan Community, Xinqiao Street Baoan District, 518000 Shenzhen, Guangdong, CHINA

Manufacturer : AOK Industrial Company Limited
1/F of 1#Building, East Block of 3/F of Building 1, And 2/F of Building 4, ST George's Science and Technology Industrial

Address : Park, Northside of Xinyu Road, Xiangshan Community, Xinqiao Street Baoan District, 518000 Shenzhen, Guangdong, CHINA

Prepared by : Shenzhen Southern LCS Compliance Testing Co., Ltd.
Address : 101-201, Building 39, Xialang Industrial Zone, Heshuikou Community, Matian Street, Guangming District, Shenzhen, China

Date of receipt sample : January 22, 2026
Date of test : January 23, 2026 to January 27, 2026
Date of issue : March 11, 2026

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full. without prior written permission of the company, The report would be invalid without specific stamp of test institute and the signatures of approver.



TEST REPORT

Testing Laboratory.....:	Shenzhen Southern LCS Compliance Testing Co., Ltd. 101-201, Building 39, Xialang Industrial Zone, Heshuikou Community, Matian Street, Guangming District, Shenzhen, China	
Test Specification:		
Standard.....:	ANSI/IES LM-82-20: CHARACTERIZATION OF OPTICAL AND ELECTRICAL PROPERTIES OF SOLID-STATE LIGHTING PRODUCTS AS A FUNCTION OF TEMPERATURE	
Test item description.....:	LED Street Light	
Trademark.....:		
Test Model/Type.....:	AOK-50WiLH-NV-A5-00-4080-T2-A	
Rating.....:	AC120-277V, 50/60Hz, 50W	
Test Results	Please see the following test data	
Prepare by.....:	Seth Cai (Project Engineer)	<i>Seth Cai</i>
Check by.....:	Ian Luo (Director)	<i>Ian Luo</i>
Approved by	Jesse Liu (Manager)	<i>Jesse Liu</i>
Test Report Form No.....:	TRF-4-S-125 A/0	
TRF Originator.....:	Shenzhen Southern LCS Compliance Testing Co., Ltd.	
Master TRF.....:	/	

Shenzhen Southern LCS Compliance Testing Co., Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Southern LCS Compliance Testing Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen Southern LCS Compliance Testing Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Table of Contents

1. Test Method	4
2. Product Information	6
3. Test equipment list	6
4. Test results	7
4.1 Spectrum	7
4.2 Result Summary	7
5. UUT temperature monitoring point, Tb, Tc	8
6. Photo of sample	9



1. Test Method

Ambient Condition.....	25.2°C
Number of hours operated prior to Measurement	(h): 0h
Stabilization time	32min/time
Orientation(burning position) of SSL product during test.....	Down
Test Item.....	Room Temperature Initial Measurement Tb =Tb,0 (52.6°C)
Test Method	The sample was tested according to the ANSI/IES LM-79-19. Photometric paramters were measured using an integrating sphere, a spectroradiometer and software. The ambient temperature condition inside the sphere was maintained at 25°C ±1°C. The sample measurements were made using a spectroradiometer connected by a fiber optic cable and detector through the detector port of the integrating sphere. 4π geometry was used during measurement. The sample was self-absorption correction used for integrating sphere, then operated at rated voltage and was stabilized before measurement. Chromaticity coordinates, correlated color temperature and color rendering index were calculated from the spectral radiant flux measurements taken at 1 nm intervals over the range of 380 to 780 nm.
Test Item.....	Measurement at First Elevated Temperature Tb,1 =78.8°C
Test Method.....	The sample was tested with a device that controls the temperature Tb of the UUT, so that Tb reaches no lower than Tb,1. Photometric paramters were measured using an integrating sphere, a spectroradiometer and software. The ambient temperature condition inside the sphere was maintained at 50°C ± 1°C. The sample measurements were made using a spectroradiometer connected by a fiber optic cable and detector through the detector port of the integrating sphere. 4π geometry was used during measurement. The sample was self-absorption correction used for integrating sphere, then operated at rated voltage and was stabilized before measurement. Chromaticity coordinates, correlated color temperature and color rendering index were calculated from the spectral radiant flux measurements taken at 1 nm intervals over the range of 380 to 780 nm.

Test Item.....:	Measurement at Second Elevated Temperature Tb,2 =64.9℃
Test Method.....:	The sample was tested with a device that controls the temperature Tb of the UUT, so that Tb reaches no lower than Tb,0 = 52.6℃. Photometric parameters were measured using an integrating sphere, a spectroradiometer and software. The ambient temperature condition inside the sphere was maintained at 35℃ ± 1℃. The sample measurements were made using a spectroradiometer connected by a fiber optic cable and detector through the detector port of the integrating sphere. 4π geometry was used during measurement. The sample was self-absorption correction used for integrating sphere, then operated at rated voltage and was stabilized before measurement. Chromaticity coordinates, correlated color temperature and color rendering index were calculated from the spectral radiant flux measurements taken at 1 nm intervals over the range of 380 to 780 nm.

Remarks.....:	The general information of applicant and manufacturer (such as the name and address), product name, model/type reference, trademark and other similar information contained in this report are all provided by the applicant, the laboratory is not responsible for verifying its authenticity.
---------------	---

REVISION HISTORY

Revision	Issue Date	Revision Content	Revised by
000	March 11, 2026	Initial Issue	Seth Cai

Remark:

000) : “---”

Original Test Report “LCSB04285097S” dated January 28, 2026.

Modify item:

Applicant/Manufacturer: AOK Industrial Company Limited

Address: 1/F of 1#Building, East Block of 3/F of Building 1, And 2/F of Building 4, ST George’ s Science and Technology Industrial Park, Northside of Xinyu Road, Xiangshan Community, Xinqiao Street Baoan District, 518000 Shenzhen, Guangdong, CHINA



Trademark:

Model: AOK-50WiLH-NV-A5-00-4080-T2-A

This co-license test report is based on the test raw-data of original test report, after construction/information review and verification, no additional tests were considered necessary.

2. Product Information


Product description.....:	LED Street Light
Model Number.....:	AOK-50WiLH-NV-A5-00-4080-T2-A
Rated Inputs.....:	AC120-277V
Rated Power.....:	50W
Declared CCT.....:	4000K
Date of Receipt Samples.....:	January 22, 2026
Quantity of Receipt Samples.....:	1 unit

3. Test equipment list

Manufacturer	Description	Equipment ID	Model	Calibration Date	Calibration Due Date
EVERFINE	2 Meter Integrating Sphere	SLCS-S-312	HAAS2000	2025/05/27	2026/05/26
EVERFINE	Digital Power Meter	SLCS-S-309	PF9810	2025/05/27	2026/05/26
EVERFINE	AC Testing Power Source	SLCS-S-310	DPS1005	2025/05/27	2026/05/26
EVERFINE	DC Testing Power Source	SLCS-S-311	WY605	2025/05/27	2026/05/26
OSRAM	Standard Lamp	SLCS-S-313	DC24V/50W	2025/06/02	2026/06/01

4. Test results

4.1 Spectrum

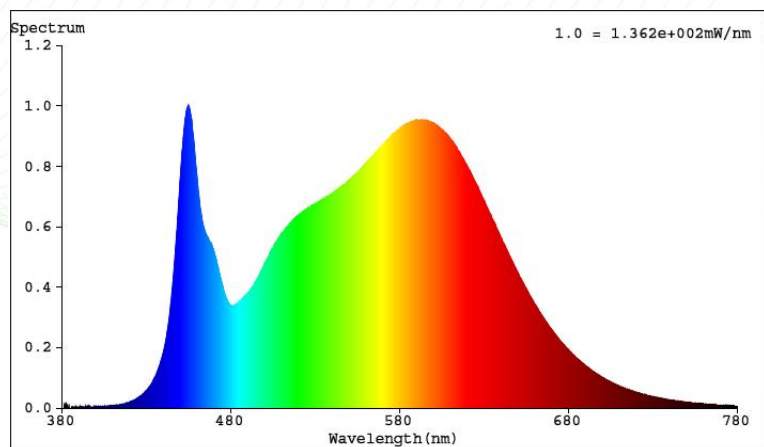


4.2 Result Summary

	Room Temperature Initial Measurement Tb,0	First Elevated Temperature Tb,1	Second Elevated Temperature Tb,2 =64.9°C
Ambient (°C)	25.2	50.1	35.0
Measured Temperature of Tb (°C)	52.6	78.8	64.9
Input Power (W)	50.24	50.06	50.16
Input Voltage (V)	230.09	230.10	230.09
Input Current (A)	0.2222	0.2214	0.2219
Luminous Flux (lm)	8544.0	8519.4	8533.3
Luminous Efficacy (lm/W)	170.06	170.18	170.12
CIE Chromaticity (u')	0.2219	0.2218	0.2218
CIE Chromaticity (v')	0.5096	0.5093	0.5095
Correlated Color Temperature (CCT)	3985	3993	3988

5. UUT temperature monitoring point, Tb, Tc

Photo document

Photos of AOK-50WiLH-NV-A5-00-4080-T2-A

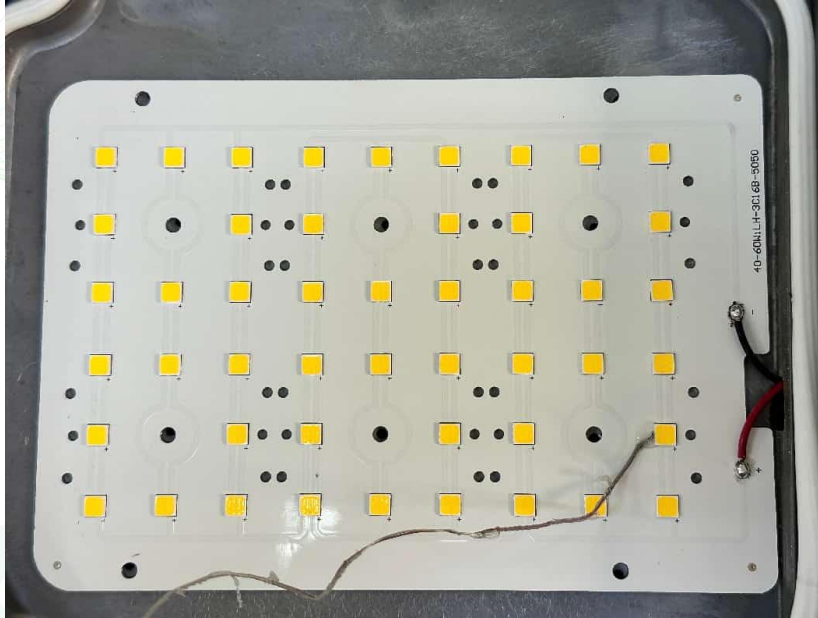

6. Photo of sample

Photo document

Photos of AOK-50WiLH-NV-A5-00-4080-T2-A



----- End of test report-----