

# TEST REPORT

## LED STREET LIGHT

Test Model: AOK-150WILH-NV-A5-00-4070-T252-P

Report Number : LCSB02026088S

Applicant : AOK Industrial Company Limited  
Address : 1/F of 1#Building, East Block of 3/F of Building 1, And 2/F of Building 4,  
ST George's Science and Technology Industrial Park, Northside of Xinyu  
Road, Xiangshan Community, Xinqiao Street Baoan District, 518000  
Shenzhen, Guangdong, CHINA

Manufacturer : AOK Industrial Company Limited  
Address : 1/F of 1#Building, East Block of 3/F of Building 1, And 2/F of Building 4,  
ST George's Science and Technology Industrial Park, Northside of Xinyu  
Road, Xiangshan Community, Xinqiao Street Baoan District, 518000  
Shenzhen, Guangdong, CHINA

Prepared by : Shenzhen Southern LCS Compliance Testing Co., Ltd.  
Address : 101-201, Building 39, Xialang Industrial Zone, Heshuikou Community,  
Matian Street, Guangming District, Shenzhen, China

Date of receipt sample : February 27, 2026  
Date of test : March 06, 2026  
Date of issue : March 09, 2026

### Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full. without prior written permission of the company, The report would be invalid without specific stamp of test institute and the signatures of approver.



# TEST REPORT

<b>Client:</b>	AOK Industrial Company Limited		
<b>Address:</b>	1/F of 1#Building, East Block of 3/F of Building 1, And 2/F of Building 4, ST George's Science and Technology Industrial Park, Northside of Xinyu Road, Xiangshan Community, Xinqiao Street Baoan District, 518000 Shenzhen,		
<b>Manufacturer:</b>	AOK Industrial Company Limited		
<b>Address:</b>	1/F of 1#Building, East Block of 3/F of Building 1, And 2/F of Building 4, ST George's Science and Technology Industrial Park, Northside of Xinyu Road, Xiangshan Community, Xinqiao Street Baoan District, 518000 Shenzhen,		
<b>Brand Name:</b>	 <small>Quality, Honesty, Service and Innovation</small>		
<b>Product Description:</b>	LED STREET LIGHT		
<b>Models:</b>	AOK-150WiLH-NV-A5-00-4070-T252-P		
<b>Rating:</b>	220-240V~, 50/60Hz, 150W		
<b>Test item:</b>	ISTMT+TM21 Test		
<b>Method:</b>	According to requirement clause 14.4.1 of IEC 60598-1:2024		
<b>Test result*:</b>	Pass		
<b>Date of sample receipt:</b>	<b>Date of Test:</b>	<b>Date of Issue:</b>	<b>Classification:</b>
2026-02-27	2026-03-06	2026-03-09	Commission Test
<b>Testing Laboratory:</b> Shenzhen Southern LCS Compliance Testing Co., Ltd. 101-201, Building 39, Xialang Industrial Zone, Heshuikou Community, Matian Street, Guangming District, Shenzhen, China			
<b>Test by:</b>	<b>Check by:</b>	<b>Approved by:</b>	
 Rose Cao/ Project Engineer	 Torres He/ Director	 Jesse Liu/ Manager	
<p><i>Remark: The duplication of this report or parts of it and its use for advertising purposes is only allowed with permission of the testing laboratory. This report contains the result of examination of the product sample submitted by the applicant. A general statement concerning the quality of the products from the series manufacturer cannot be derived therefore.</i></p>			



**General remarks:**

1. The test results presented in this report relate only to the object tested.
2. This report shall not be reproduced, except in full, without the written approval of the Issuing Testing Laboratory. The authenticity of this Test Report and its contents can be verified by contacting the Testing Laboratory, responsible for this Test Report.
3. The general information of applicant and manufacturer (such as the name and address), product name, model/type reference, trademark and other similar information contained in this report are all provided by the applicant, the laboratory is not responsible for verifying its authenticity.

**Modified Information**

Version	Report No.	Revision Date	Summary
V1.0	LCSB02026088S	/	Original Version

**General product information:**

- Measurement was conducted at a stable ambient temperature  $55^{\circ}\text{C} \pm 1^{\circ}\text{C}$ .
- The ISTMT was performed with the cover installed on the LED package and the luminaire was installed according to actual use of the installation status.

**Model List:**

Model No.	Rating	CCT	LED Driver
AOK-150WiLH-NV-A5-00-4070-T252-P	220-240V~, 50/60Hz, 150W	4000K	SS-150NH-V300BHB

**LED specification:**

Model/Series	Manufacturer	VF (V)	IF (mA)
TS1-H50YL-1001BB	Shenzhen Tongyifang Optoelectronic Technology Co., Ltd.	27.0-30.0V	100mA

**Equipment list:**

Equipment No.	Equipment Name	Specification data	Cal. Date
SLCS-S-004	Digital Power Meter	YOKOGAWA/ WT210 / 91L424211	2025/4/27
SLCS-S-011	J Thermocouple	DE AO/J	2025/4/28
SLCS-S-210	Temperature rising recorder	34972A	2025/4/30
SLCS-S-102	Aging House	LA-201207002	2025/12/20

## 1. GENERAL INFORMATION

### 1.1 Product Information

<b>Information of product:</b>	
Product description	LED STREET LIGHT
Model Number	AOK-150WiLH-NV-A5-00-4070-T252-P
Manufacturer of LED Driver	Shenzhen SOSEN Electronics Co., Ltd
LED Driver models	SS-150NH-V300BHB
Rated Inputs	220-240V~, 50/60Hz
Rated Power	150W
Declared CCT.	4000K
LED Package, Array or Module	8S12P, total 96pcs LED chip(s)
Date of Receipt Samples	2026-02-27
Quantity of Receipt Samples	1 unit
<b>Information of LED chip:</b>	
LED Chip Manufacturer	Shenzhen Tongyifang Optoelectronic Technology Co., Ltd.
LED type	LED Package
Model of the LED chip(s)	TS1-H50YL-1001BB
Forward voltage of the LED chip	27.0-30.0V
Forward current of the LED chip	100mA
ISTMT temperature of the LED chip	105°C
IES LM-80 Test Report	Report No.: N02A24040931L00101R1 Issue Date: 2024-05-09 Tested and Prepared by: Guangdong Meide Testing Technology Co., Ltd.



## 1.2 Reference Standards or Methods

The following standards are partly or totally used or referenced for test

According to requirement clause 14.4.1 of IEC 60598-1:2024

IES LM-84-14: Measuring Luminous Flux and Color Maintenance of LED Lamps, Light Engines, and Luminaires---Annex A: measurement of in-situ conditions LED case temperature.

## 2. Test Result of ISTMT

### 2.1 Electrical data

Criteria Item	Result
Input voltage	230Vac, 50Hz
Input current	0.667A
Total power	150.6W
Power factor	0.981
Current on each LED module	53.33mA
Remark: There are 8S12P, total 96pcs LED chip(s) in models AOK-150WiLH-NV-A5-00-4070-T252-P, That we are measurement the total current of a driver output was 640mA, and current on each parallel was 53.33mA (640mA/12=53.33mA), Because in each series that the forward current on each LED chip(s) was equivalent, so forward current on each LED chip(s) was 53.33mA.	

### 2.2 Temperature data

Ambient Temperature, ° C :	55±1°C	Relative Humidity, %Rh :	45%Rh~75%Rh	
Supply voltage:	230Vac, 50Hz	Type of thermocouples:	J	
Test Product Model	AOK-150WiLH-NV-A5-00-4070-T252-P			
Test LED Model	TS1-H50YL-1001BB			
Test LED Driver Model	SS-150NH-V300BHB			
Test Duration	≥3.5Hours			
Item	Parts	Test Result (°C)	Revise to ta. (°C)	Limit(°C)
1	Measured maximum Temperature @ TEMLED	67.4	67.3	105
2	tc of LED driver	62.9	62.8	90
3	Ambient	55.1	55.0	--
Remark: The ISTMT was performed with the cover installed on the LED package and the luminaire was installed according to actual use of the installation status.				

### 3. Lumen Maintenance Projection (IESNA TM-21-11 Method)

#### 3.1 LM-80 report summary for LED chip(s)

Manufactured by	Shenzhen Tongyifang Optoelectronic Technology Co., Ltd.		
LED Model	TS1-H50YL-1001BB		
Number of LED light source tested	25units		
Drive Current	100mA		
Case temperature	55°C	85°C	105°C
18000 hours lumen maintenance	97.36%	97.15%	96.95%
18000 hours color maintenance ( $\Delta u'v'$ )	0.0041	0.0044	0.0045

#### 3.2 Lumen Maintenance Projection for luminaires

Criteria Item	Result
50000h at which to estimate lumen maintenance	92.01%
Drive current on each LED light source	53.33mA
Reported L70 lumen maintenance life	>108000





### TM-21 Inputs

**Instructions**

Yellow fields are completed by the user. Fields not used should be left blank. Cyan fields are calculated based on user entries.

First, enter a description of the LED light source tested. Then complete the fields labeled "LM-80 Testing Details". Test duration must be at least 6,000 hours. If only one case temperature data set is to be used (no interpolation), complete only "Tested case temperature 1". For only two case temperature data sets, complete 1 and 2.

Next, further to the right, in the corresponding box(es) for each tested case temperature, enter the test data along with the time (in hours) at which each measurement was taken. Data entered must be normalized then averaged measured data (per TM-21 sections 5.2.1 and 5.2.2). If case temperatures have different test durations, enter data up to the lowest of the test durations for all of the case temperatures.

Enter drive current, *in-situ* temperature data and the percentage of initial lumens to project to in the fields labeled "In-Situ Inputs".

Results can be tailored to estimate lumen maintenance at a specific time by entering a value (t) in the yellow field. A complete TM-21 report will appear on the next tab labeled "Report".

**Description of LED Light Source Tested**  
(manufacturer, model, catalog number)

Shenzhen Tongyifang Optoelectronic Technology Co., Ltd.  
TS1-H50YL-1001BB

LM-80 Testing Details	
Total number of units tested per case temperature:	25
Number of failures:	0
Number of units measured:	25
Test duration (hours):	18000
Tested drive current (mA):	100
Tested case temperature 1 ( $T_{c1}$ , °C):	55
Tested case temperature 2 ( $T_{c2}$ , °C):	85
Tested case temperature 3 ( $T_{c3}$ , °C):	105

In-Situ Inputs	
Drive current for each LED package/array/module (mA):	53.33
In-situ case temperature ( $T_{in}$ , °C):	67.3
Percentage of initial lumens to project to (e.g. for $L_{70}$ , enter 70):	70

Results	
Time (t) at which to estimate lumen maintenance (hours):	50,000
Lumen maintenance at time (t) (%):	92.01%
Reported $L_{70}$ (hours):	>108000

#### LM-80 Test Inputs

Test Data for 55°C Case Temperature		Test Data for 85°C Case Temperature		Test Data for 105°C Case Temperature	
Time (hours)	Lumen Maintenance (%)	Time (hours)	Lumen Maintenance (%)	Time (hours)	Lumen Maintenance (%)
1000	100.14%	1000	100.11%	1000	100.02%
2000	100.00%	2000	99.86%	2000	99.73%
3000	99.84%	3000	99.70%	3000	99.52%
4000	99.71%	4000	99.55%	4000	99.35%
5000	99.56%	5000	99.39%	5000	99.18%
6000	99.41%	6000	99.25%	6000	99.02%
7000	99.25%	7000	99.08%	7000	98.85%
8000	99.06%	8000	98.83%	8000	98.64%
9000	98.83%	9000	98.63%	9000	98.42%
10000	98.72%	10000	98.53%	10000	98.29%
11000	98.57%	11000	98.33%	11000	98.12%
12000	98.37%	12000	98.13%	12000	97.89%
13000	98.19%	13000	97.95%	13000	97.73%
14000	98.03%	14000	97.77%	14000	97.52%
15000	97.84%	15000	97.59%	15000	97.38%
16000	97.67%	16000	97.45%	16000	97.19%
17000	97.53%	17000	97.30%	17000	97.06%
18000	97.36%	18000	97.15%	18000	96.95%



### TM-21 Report

Table 1: Report at each LM-80 Test Condition			
Description of LED Light Source Tested (manufacturer, model, catalog number)		Shenzhen Tongyifang Optoelectronic Technology Co., Ltd. TS1-H50YL-1001BB	
Test Condition 1 - 55°C Case Temp		Test Condition 2 - 85°C Case Temp	
Sample size	25	Sample size	25
Number of failures	0	Number of failures	0
DUT drive current used in the test (mA)	100	DUT drive current used in the test (mA)	100
Test duration (hours)	18,000	Test duration (hours)	18,000
Test duration used for projection (hour to hour)	9,000 - 18,000	Test duration used for projection (hour to hour)	9,000 - 18,000
Tested case temperature (°C)	55	Tested case temperature (°C)	85
$\alpha$	1.718E-06	$\alpha$	1.742E-06
B	1.004	B	1.002
Reported $L_{70}(18k)$ (hours)	>108000	Reported $L_{70}(18k)$ (hours)	>108000

Table 2: Interpolation Report (projection based on <i>in-situ</i> temperature entered)	
$T_{s,1}$ (°C)	55.00
$T_{s,1}$ (K)	328.15
$\alpha_1$	1.718E-06
$B_1$	1.004
$T_{s,2}$ (°C)	85.00
$T_{s,2}$ (K)	358.15
$\alpha_2$	1.742E-06
$B_2$	1.002
$E_{\theta}/k_0$	5.33E+01
A	2.021E-06
$B_0$	1.003
$T_{s,i}$ (°C)	67.30
$T_{s,i}$ (K)	340.45
$\alpha_i$	1.728E-06
Reported $L_{70}(18k)$ at 67.3°C (hours)	>108000

## 4. Photos

### 4.1 Thermocouple contact photo of @TEM<sub>LED</sub>



Photo 1

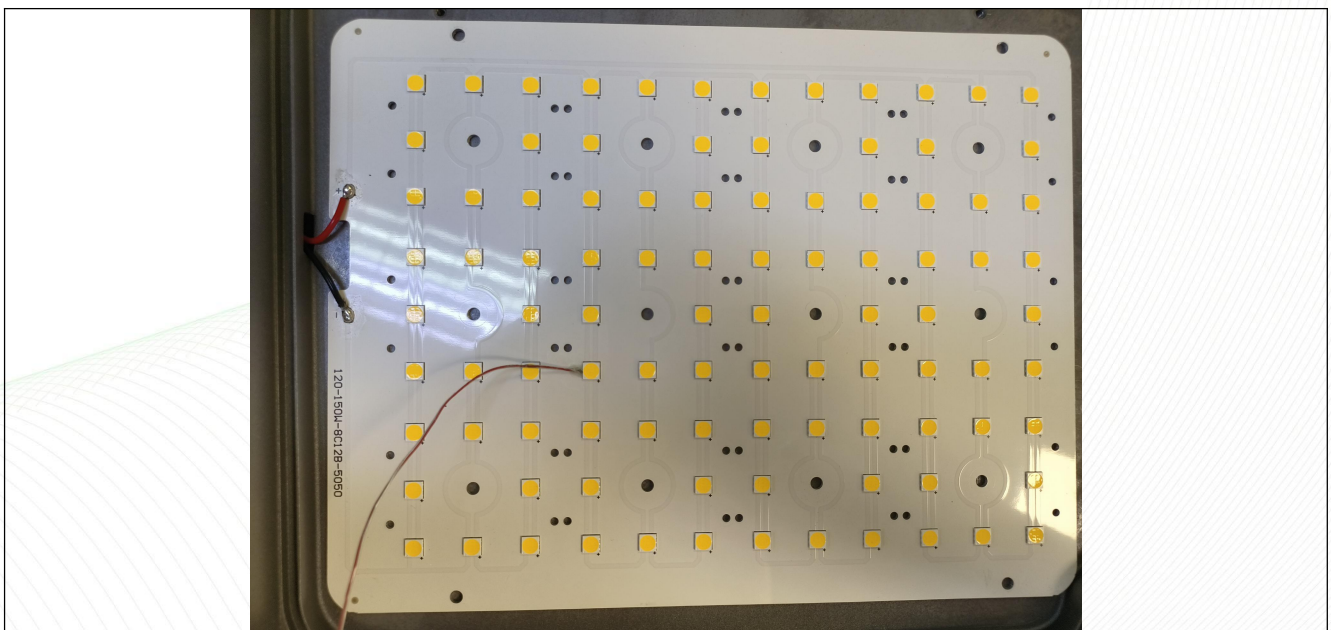


Photo 2



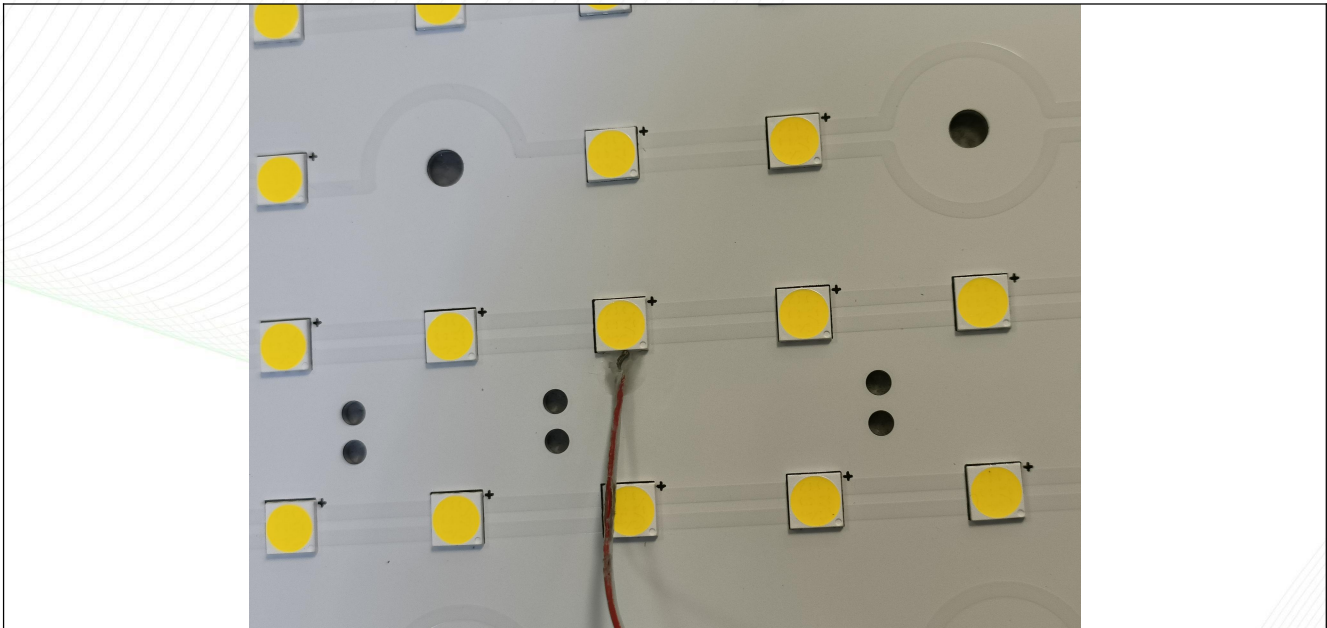


Photo 3

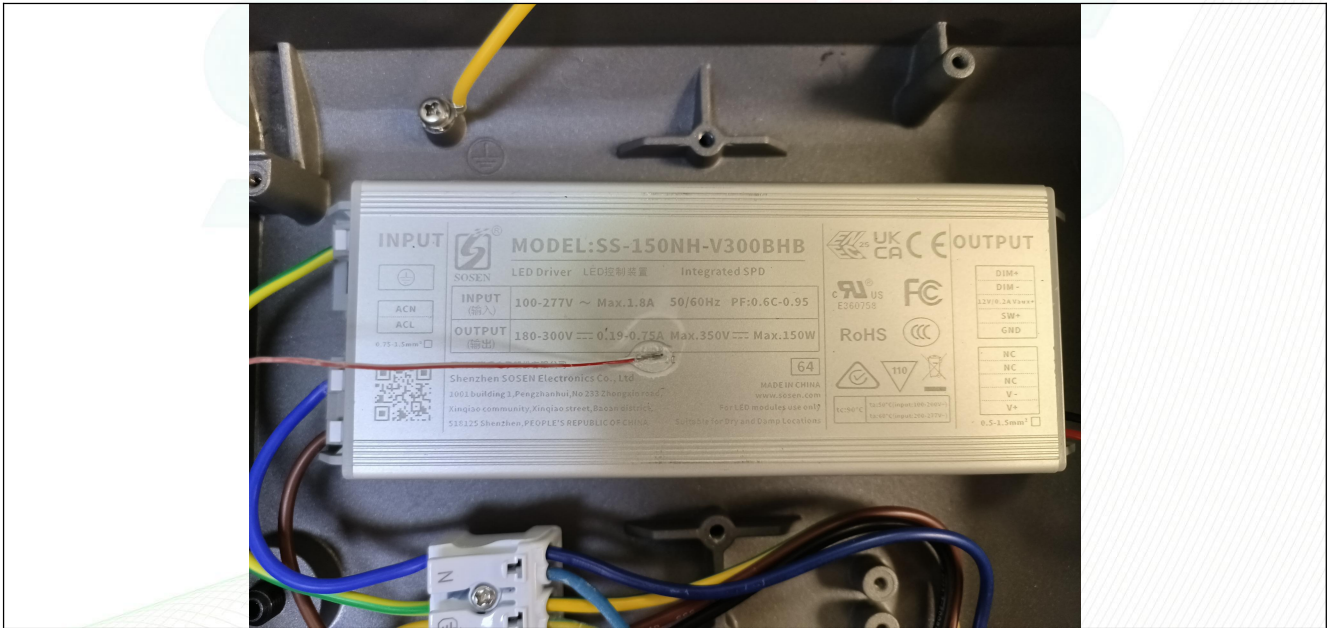


Photo 4



## 4.2 Product Photos



Photo 1



Photo 2





Photo 3 (label)

----- End of test report -----